This management discussion and analysis of financial position and results of operations ("MD&A") is prepared as of October 24, 2018 and should be read in conjunction with the unaudited financial statements for the period ended August 31, 2018 of Power Metals Corp. ("Power Metals" or the "Company") with the related notes thereto. All dollar amounts included therein and in the following MD&A are expressed in Canadian dollars except where noted. Readers may also want to refer to the November 30, 2017 audited financial statements and the accompanying notes.

#### Forward looking statements

Certain statements contained in this document constitute forward-looking information. These statements relate to future events or future performance. The use of any of the words "could", "intend", "expect", "believe", "will", "projected", "estimated" and similar expressions and statements relating to matters that are not historical facts are intended to identify forward-looking information and are based on the Company's current belief or assumptions as to the outcome and timing of such future events. Actual future results may differ materially.

Additional information related to the Company is available for view on SEDAR at www.sedar.com.

#### **Description of Business**

The Company is an exploration company engaged in the acquisition and exploration of resource properties. The Company is a reporting issuer in British Columbia, Alberta and Ontario. The Company trades on the TSX Venture Exchange under the symbol "PWM".

#### **Risks and Uncertainties**

The Company's principal activity is resource exploration and development. Companies in this industry are subject to many and varied kinds of risks, including but not limited to, environmental, fluctuating resource price, social, political, financial and economical. Additionally, few exploration projects successfully achieve development due to factors that cannot be predicted or foreseen. While risk management cannot eliminate the impact of all potential risks, the Company strives to manage such risks to the extent possible and practicable.

The risks and uncertainties described in this section are considered by management to be the most important in the context of the Company's business. The risks and uncertainties below are not listed in order of importance nor are they inclusive of all the risks and uncertainties the Company may be subject to as other risks may apply.

- Any resource property interests of the Company are or will be, in the near term, in the exploration stage
  only and consequently, exploration of the Company's resource property interests may not result in any
  discoveries of commercial levels of resources. If the Company's efforts do not result in any discovery of
  commercial resource level, the Company will be forced to look for other exploration projects or cease
  operations.
- The Company's current assets and activities are subject to extensive Canadian federal, provincial, territorial and local laws and regulations. The costs associated with compliance with these laws and regulations are substantial and possible future laws and regulations, changes to existing laws and regulations or more stringent enforcement of current laws and regulations by governmental authorities, could cause additional expenses, capital expenditures, restrictions on or suspensions of the Company's operations and delays in the development of its properties.
- In the ordinary course of business, the Company is required to obtain and renew governmental permits for existing operations and any ultimate development, construction and commencement of new resource or mining operations. The Company may not be able to obtain or renew permits that are necessary to its operations, or the cost to obtain or renew permits may exceed what the Company believes it can recover from a given resource property once in production. Any unexpected delays or costs associated with the

permitting process could delay the development or impede the operation of a resource or mine, which could adversely impact the Company's operations and profitability.

- The Company competes with many companies possessing greater financial resources and technical abilities
  than itself for the acquisition of resource properties including mineral concessions, claims, leases, other
  mineral interests, and equipment required to conduct its activities as well as for the recruitment and
  retention of qualified employees.
- Substantial expenditures are required to be made by the Company to establish mineral reserves and the
  Company may not either discover minerals in sufficient quantities or grade to be economically feasible, or
  may not have the necessary required funds. Estimates of mineral reserves and mineral resources can also be
  affected by environmental factors, unforeseen technical difficulties and unusual or unexpected geological
  formations. Material changes in mineral reserve or mineral resource estimates, grades, stripping ratio or
  recovery rates may affect the economic viability of any project.
- The lack of available infrastructure may adversely affect the Company's operations and profitability. If adequate infrastructure is not available in a timely manner, there can be no assurance that the development of the Company's projects will be commenced or completed on a timely basis, if at all; the Company's operations will achieve anticipated results; or the construction costs and ongoing operating costs associated with the development of the Company's advanced stage exploration projects will not be higher than anticipated. In addition, unusual or infrequent weather phenomena, sabotage, government or other interference in the maintenance or provision of such infrastructure could adversely affect the Company's operations and profitability.
- The Company currently has limited insurance covering its assets or operations and as a consequence, could incur considerable costs. As a result of having limited insurance, the Company could incur significant costs that could have a materially adverse effect upon its financial condition and even cause the Company to cease operations. To date, the Company has not experienced any material losses due to hazards arising from its operations.
- Although the Company has sought and received such representations as it has been able to achieve from vendors in connection with the acquisition of or options to acquire an interest in its mining or resource properties and has conducted limited investigations of legal title to each such property, the resource and /or mining properties in which the Company has an interest may be subject to prior unregistered agreements or transfers or native land claims and title may be affected by undetected defects.
- The price of uranium or other metals may adversely affect the economic viability of any of the Company's resource and/or mineral properties. The price of uranium is affected by numerous factors beyond the control of the Company including producer hedging activities, the relative exchange rate of the U.S. dollar with other major currencies, demand, political and economic conditions and production levels. In addition, the price of uranium has been volatile over short periods of time due to speculative activities. The price of other metals and mineral products that the Company may explore for have the same or similar price risk factors.
- The Company is authorized to issue an unlimited number of common shares without par value. It is the Company's intention to issue more common shares. Sales of substantial amounts of common shares (including shares issuable upon the exercise of stock options and the exercise of warrants), or the perception that such sales could occur, could materially adversely affect prevailing market prices for the common shares and the ability of the Company to raise equity capital in the future.
- The Company's future performance on the development of any mineral properties is dependent on key personnel. The loss of the services of any of the Company's executives or directors could have a material adverse effect on the Company's business.

#### **Exploration Projects**

#### Case Lake

On September 21, 2017, the Company announced that ongoing drilling has successfully intersected significant lithium mineralization at the Company's Case Lake Property. Power Metals has an 80% interest with its 20% working interest partner MGX Minerals Corp. (CSE:XMG). The Case Lake drill target area consists of a pegmatite dyke swarm: North, Main and South Dykes as well as multiple unnamed pegmatite dykes. Drill hole PWM-17-08 intersected 35.22 m of continuous spodumene pegmatite as part of the Main Dyke with very coarse-grained spodumene crystals up to 10 cm long. A total of 12 drill holes have been drilled to date. With the exception of hole 3, all drill holes intersected spodumene bearing pegmatite (Table 1, Figure 7). Assays are pending. The drill program targeted downdip extension of North, Main and South Dykes in an area of known mineralization and the east and west along strike extension of the three Dykes in areas with no previous drill holes. This drill program has also successfully drilled the first ever holes on the South Dyke.

Johnathan More, Chairman of Power Metals stated, "We couldn't be more pleased with our progress on the drill program to date and eagerly await assay results to confirm our interpretation of the potential tonnage and grade at Case Lake. With our drill program set for a minimum of 5,000 metres, we expect the balance of the drill program to be completed by the end of October, at which point we will quickly aim to deliver a 43-101 compliant resource calculation to the market."

#### Preliminary highlights include:

Drill holes PWM-17-08, 09 and 10 are the best drill holes of the program so far (Table 2). These holes were designed to test the up and down dip extension of the Main Dyke.

- PWM-17-08 intersected continuous spodumene pegmatite from 18.86 to 54.08 m for an interval of 35.22 m of the Main Dyke (Figures 1 and 2).
- PWM-17-09 intersected continuous spodumene pegmatite from 26.5 to 60.0 m for an interval of 33.5 m of the Main Dyke. This intersection included a 42 cm long x 2 cm wide pale green spodumene blade (Figures 3 to 6).
- PWM-17-10 intersected spodumene pegmatite from 33.83 to 62.05 m for an interval of 28.22 m of Main Dyke. This interval includes two sections of Case Batholith host rock: 2.99 m and 0.62 m long.

Drill holes PWM-17-01, 02 and 03 successfully intersected the Main and South Dykes as part of the western extension of the strike length of both Dykes.

- These holes extended the Main Dyke Zone lithium mineralization 152 m to the west from historic drilling. These were the first holes ever drilled on the South Dyke and were designed to test for lithium mineralization at depth. Assays are pending.
- Pegmatite dykes were intersected within a few meters of our predicted intersections based on our 3D model which gave us confidence in the 3D model.
- The Main Dyke Zone in PWM-17-02 was intersected from 53.10 to 88.84 m for an interval of 35.74 m. The Zone consisted of a 10.4 m long spodumene pegmatite dyke with up to 25 vol% very coarse-grained spodumene, a 2.99 m long aplite dyke, and multiple other thin aplite dykes. Assays are pending. (Visual estimates of spodumene vol% do not always equate to Li2O % grade.)

Drill holes PWM-17-04 and 05 were designed to test the downdip extension of North and Main Dykes downdip of historic hole DDH-5.

• Drill hole PWM-17-04 intersected 1.7 m of North Dyke. The Main Dyke Zone was intersected from 75.2 to 107.55 m for an interval of 32.35 m. The Main Dyke Zone consisted of 3 spodumene-bearing dykes up to 12.8 m long, one pegmatite dyke and one aplite dyke. One dyke within of the Main Dyke Zone is a 1.85 m long spodumene dyke which contains 30-40 vol% pale green coarse-grained spodumene. Assays are pending. (Visual estimates of spodumene vol% do not always equate to Li2O % grade.)

Drill holes PWM-17-06 and 07 were designed to test the downdip extension of the Main Dyke downdip from historic hole DDH-2. Drill hole PWM-17-06 intersected 9 m of spodumene pegmatite.

Drill holes PWM-17-11 and 12 were designed to test the eastern extension of the Main Dyke along strike. These holes intersected multiple pegmatite dykes hosted by metasedimentary rocks.

Summation of Significant intersections of spodumene pegmatite at the Main Dyke, Case Lake

Drill Hole	From (m)	To (m)	Interval (m)	Lithology
PWM-17-02	53.10	63.50	10.40	spodumene pegmatite
PWM-17-04	75.20	88.00	12.80	spodumene pegmatite
PWM-17-06	82.00	91.00	9.00	spodumene pegmatite
PWM-17-08	18.86	54.08	35.22	continuous spodumene pegmatite
PWM-17-09	26.50	60.00	33.50	continuous spodumene pegmatite
PWM-17-10	33.83	62.05	28.22	spodumene pegmatite including a
				total of 3.61 m of tonalite



Figure 1 PWM-17-08 Main Dyke spodumene pegmatite, Box 5 to 8, 18.14 to 35.44 m.



Figure 2 PWM-17-08 Main Dyke pegmatite, Box 9 to 12, 35.44 to 53.08 m.



Figure 3 PWM-17-09 Main Dyke pegmatite, Box 5 to 8, 18.28 to 36.02 m



Figure 2 PWM-17-08 Main Dyke pegmatite, Box 9 to 12, 35.44 to 53.08 m.



Figure 3 PWM-17-09 Main Dyke pegmatite, Box 5 to 8, 18.28 to 36.02 m



Figure 6 PWM-17-09 Main Dyke 42 cm long spodumene blade near 32 m.

Table 1. Power Metals 2017 Case Lake drill hole collar location. UTM NAD83, Zone 17.

	Easting	Northing	Elevation	Depth	Azimuth	
Drill hole	(m)	(m)	(m)	(m)	(°)	Dip (°)
PWM-17-01	578021.1	5431600.4	346.6	155	150	45
PWM-17-02	578002.1	5431633.2	346.8	183	150	45
PWM-17-03	577982.4	5431671.5	343.2	212	150	45
PWM-17-04	578118	5431734	347	140	150	45
PWM-17-05	578117.6	5431735	347	138	150	70
PWM-17-06	578167	5431769	347	140	150	45
PWM-17-07	578167	5431769	347	133	150	68
PWM-17-08	578208	5431702	350	70	150	45
PWM-17-09	578208	5431702	350	75	150	82
PWM-17-10	578152	5431675	350	100	150	45
PWM-17-11	578247	5431750	349	90	150	45
PWM-17-12	578254	5431798	349	120	150	45

True mineralization thickness is not yet known.

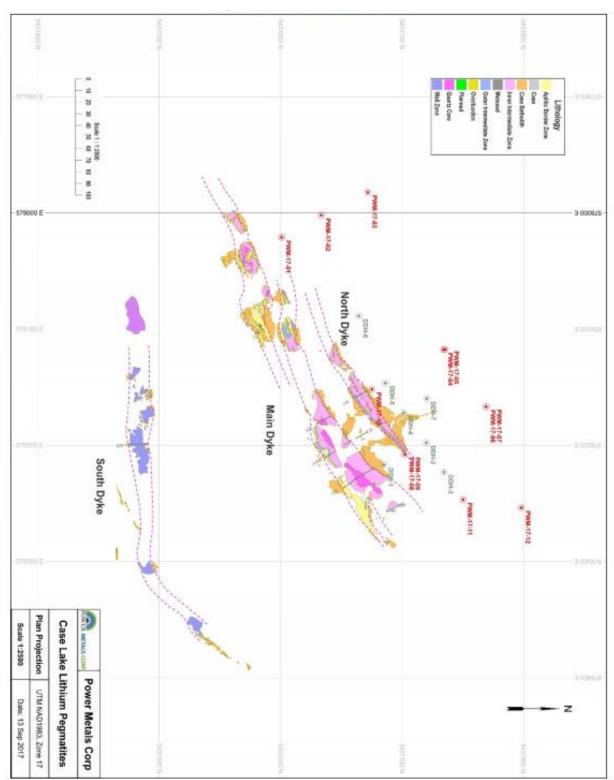


Figure 7 Case Lake drill plan and detailed outcrop map.

On October 10, 2017, the Company announced that prospecting has discovered spodumene in the East Dyke pegmatite on the east side of Case River, 450 m southeast from our current drill program. Power Metals has an 80% interest with its 20% working interest partner MGX Minerals Corp. (CSE:XMG). Historic work on the East Dyke suggested that spodumene was not present on this pegmatite dyke. The East Dyke has a known strike length of 750 m and consists of white K-feldspar-quartz-muscovite pegmatite and garnet aplite similar to the Main Dyke currently being drilled. This is a significant increase in the potential lithium mineralization on the Case Lake Property.

Power Metals' VP of Exploration, Dr. Julie Selway, PH.D., P.Geo. discovered the spodumene by peeling back a thick mat of moss off of the outcrop to expose outcrop not previously looked at (Figure 1). The spodumene is fine-to coarse-grained, 0.5 to 6 cm long and locally is up to 10% spodumene (Figure 2). Additional prospecting on the East Dyke will search for more spodumene.



Figure 1 East Dyke spodumene pegmatite outcrop. Red flags mark spodumene occurrences.



Figure 2 Pale green spodumene crystals next to white K-feldspar in the East Dyke,

Power Metals is actively prospecting the 9.0 x 9.5 km Case Lake Property for additional spodumene pegmatites. Prospecting on the northernmost claim next to Translimit Road, 7 km north of current drill program has identified white K-feldspar, quartz muscovite pegmatite dykes hosted by granodiorite similar to the Main Dyke. More prospecting will be done in this area in search of spodumene.

Power Metals' ongoing 5000 m drill program on the Main, North and South Dykes continues to intersect significant lithium mineralization. The current drill program has extended the Main Dyke spodumene pegmatite zone over 200 m to the west (and growing) from the historic drilling. The Main Dyke Zone is typically 32-35 m wide and consists of multiple spodumene pegmatite dykes. The Company is currently awaiting assays and will press release as soon as they are processed.

On November 16, 2017, the Company announced nearing completion of our successful 5000 metre drill program. We are currently drilling hole #44 (PWM-17-44) and have 5 more shallow holes planned for a total of 49 holes (See Figure 2 below).

The Company's recently drilled hole #40 (PWM-17-40) intersected 37.7 m of continuous pegmatite of which the spodumene zone is from 20.0 to 35.83 m (interval of 15.83 m long) with up to 30% spodumene in the quartz core (see Figure 1). Assays will be released as soon as they are available. Assays are pending for the majority of the holes, but examination of the drill core indicates that the spodumene mineralization is rich, thick and close to surface. For example, in hole #35 (PWM-17-35), the North Dyke is 6.7 m wide with 10-15% spodumene overall and the Main Dyke Zone is 29.4 m wide and is composed of multiple pegmatite dykes (Power Metals press release dated Nov. 2, 2017).

Some highlights of the drill program so far include:

- PWM-17-08: 1.94 % Li2O and 323.75 ppm Ta over 26.0 m
- PWM-17-09: 1.23 % Li2O and 148.0 ppm Ta over 16.0 m
- PWM-17-10: 1.74 % Li2O and 245.96 ppm Ta over 15.06 m
- extended the Main Dyke spodumene pegmatite zone 250 m to the west of the historic drill holes

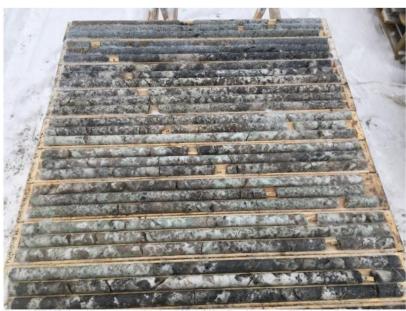


Figure 1 PWM-17-40 continuous pegmatite dyke from 8.23 to 45.93 m. Note the presence of high grade pale green spodumene auartz core in boxes 5 to 8.

Power Metals prospecting program successfully discovered spodumene mineralization in the East Dyke (press release dated Oct. 10, 2017) and Northeast Dyke (press release dated Nov. 13, 2017). Two grab samples of spodumene-muscovite-K-feldspar-quartz pegmatite from the East Dyke were analyzed with up to 2.56 % Li2O and up to 181 ppm Ta (Table 1). This preliminary prospecting and assays on the East Dyke indicate that high grade spodumene similar to that on the Main Dyke exists on the East Dyke.

Table 1 Grab sample assays from East Dyke (NAD 83, Zone 17).

Waypoint	Sample No	Easting (m)	Northing (m)	Li <sub>2</sub> O (%)	Ta (ppm)
JK-17-21	529451	578595	5431395	1.03	181
JK-17-35	529457	578593	5431399	2.56	41.5

Power Metals is planning a 2000 metre drill program on the Northeast Dyke in January 2018. The Company is also in the final steps of contracting an industry leading metallurgist experienced in working with spodumene pegmatites. Upon receipt of final assay results, an analysis of the initial characterization of the spodumene in the Main Dyke will be undertaken as well as other metallurgical testing. The Company will issue a press release once the contract has been finalized in the near future.

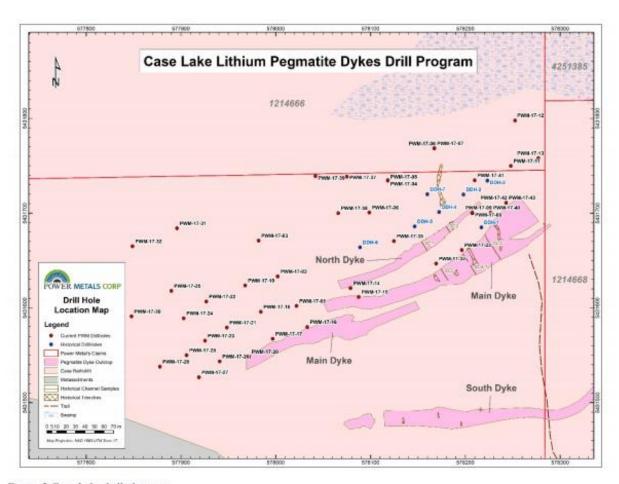


Figure 2 Case Lake drill plan map.

On November 24, 2017, the Company announced the completion of a successful drill program for a total of 5400.08 metres comprising of 50 drill holes at its' Case Lake Property, east of Cochrane, Ontario (Figure 3). The Company increased the overall meterage of the drill program by 400 m to target newly discovered spodumene dykes. Assays are pending.

Power Metals' exploration team discovered two new spodumene pegmatite dykes located between the Main Dyke and the South Dyke. The first new dyke was intersected in hole #42 and #43 (PWM-17-42 and PWM-17-43) with locally up to 30% spodumene. The exploration team then targeted the new dyke to intersect it again in hole #44 and

#49 (PWM-17-44 and PWM-17-49) (Figure 1). A review of the 3D model indicates that we also intersected it at the bottom of hole #40 and #41 (PWM-17-40 and PWM-17-41). This new dyke is located 20-40 m down hole from the Main Dyke and 35-40 m vertical depth from the surface. This dyke has similar mineralogy to the Main Dyke with aplite border zone, spodumene granite and quartz + spodumene core zone. The second new spodumene pegmatite dyke was intersected in hole #42 and #49 (PWM-17-42 and PWM-17-49). It is located 50 m down hole from the Main Dyke and 50-80 m vertical depth from surface. Both new dykes are open in all directions. Drilling in the winter will be performed to define these new dykes.

The final drill hole of the program, hole #50 (PWM-17-50), was a shallow hole on the Main Dyke and it intersected 32.02 m of continuous pegmatite (11.18 to 43.2 m) (Figure 2). The pegmatite was zoned with 20-25% coarse-grained spodumene over 13.74 m followed by 3.39 m of quartz core and followed by 11.75 m of 20-25% coarse-grained spodumene.

The Main Dyke Zone is consistently 30-35 m wide and is composed of either one continuous pegmatite dyke close to surface or multiple pegmatite dykes at depth. The Main Dyke is actually two dykes along the same strike: east part and west part. The high-grade lithium zones within the Main Dyke pegmatite are the intermediate zone (muscovite-quartz-albite-K-feldspar), the fine-grained spodumene granite zone (quartz-albite-K-feldspar) and the quartz core ( $\pm$  Kfeldspar). The spodumene granite seems to be more common in the west part than the east part. The intermediate zone and quartz core occurs in both east and west parts.

The Company is excited to announce a 2000 m drill program on the Northeastern Dyke commencing the first week of January 2018. This drill program is fully funded and will drill the newly found structure located 900 m northeast and along strike of the recently completed drill program (See news release dated Nov. 13th, 2017). Power Metals discovered up to 40% spodumene on surface open in all directions at this new location.



Figure 1 PWM-17-44, Boxes 12 to 17, photo of new spodumene pegmatite dyke below the Main Dyke. Note abundant pale green



Figure 2 PWM-17-50 Main Dyke continuous pegmatite from 11.18 to 43.2 m. Note abundance of spodumene in boxes 3 and 4 and 7 to 9. Quartz core is in boxes 5 and 6.

On December 4, 2017, the Company announced assay results to confirm the presence of high-grade spodumene in the Northeast dyke at Case Lake, Cochrane, Ontario. The assay results range from 6.04% to 7.14% Li2O for rock spodumene grab samples on surface. The assays given in Table 1 represent almost pure spodumene and drilling is required to determine the lithium grade of the Northeast pegmatite dyke. The Company has planned 2,000 metre drill program that will be commencing on the Northeast dyke on January 3rd 2018.

On the south outcrop, one green spodumene crystal 32 cm long by 2 cm wide, sample number 529463 has 6.04 % Li2O (Figure 1). On the north outcrop, the quartz core of the pegmatite dyke contains up to 40% spodumene megacrysts with cross sections up to 14 cm across (Figure 2). This was sample 529461 with 6.79 % Li2O. The highest grade spodumene sample came from the western edge of the south outcrop with 7.14 % Li2O.

Table 1 Lithium assays for spodumene grab samples from Northeast Dyke (UTM NAD 83, Zone 17)

Waypoint	Easting (m)	Northing (m)	Sample No.	Li <sub>2</sub> O (%)
JK-17-43	579053	5432292	529459	7.14
JK-17-45	579104	5432372	529460	6.75
JK-17-53	579065	5432293	529461	6.79
JK-17-52	579055	5432295	529463	6.04

in a press release dated November13th, 2017, Power Metals announced that it had discovered spodumene megacrysts (up to 32 cm long) on the Northeast Dyke located 900 m northeast along strike of the current drill program on the North and Main Dykes and is within the same tonalite dome as the North and Main Dykes. Since the Northeast, North and the Main Dykes are along the same strike and within the same dome, this indicates that they were emplaced along the same deep-seated structure. The Northeast Dyke has a pair of parallel pegmatite dykes: north and south outcrops similar to the North and Main Dykes that were recently drilled.



Figure 1 32 cm by 2 cm spodumene crystal in Northeast Dyke – south outcrop (sample 529463)



Figure 2 Oval cross sections of at least 8 beige spodumene megacrysts up to 14 cm across in quartz core of Northeast Dyke – south outcrop (sample 529461)



Figure 3 Pale green spodumene megacryst 30 cm long and 8 to 10 cm wide from Northeast Dyke – north outcrop (sample 529460)

*On January 5, 2018*, the Company announced that drill holes intersected, for assays received to date, more impressively wide high-grade lithium (Li) and tantalum (Ta) mineralized intervals for the Main Dyke at Case Lake, east of Cochrane, Ontario.

- **1.** PWM-17-33: 2.19 % Li2O and 195.27 ppm Ta over 6.0 m (5.0 to 11.0 m)
- 2. PWM-17-33: 2.11 % Li2O and 259.31 ppm Ta over 11.0 m (22.0 to 33.0 m)
- 3. PWM-17-34: 1.81 % Li2O and 136.10 ppm Ta over 17.0 m

Drill hole PWM-17-33 has impressive lithium and tantalum mineralization (Figures 1 and 2). Lithium grades are up to 3.02 % Li2O over 2.0 m and 2.84 % Li2O over 4.0 m in PWM-17-33. Tantalum grades are up to 554.0 ppm Ta over 2.0 m in PWM-17-33. The high-grade coarse-grained spodumene inner intermediate zone from 5.0 to 11.0 m is followed by a very coarse-grained white K-feldspar and pure quartz core (11.0 to 22.0 m) and by another high-grade coarse-grained spodumene inner intermediate zone from 22.0 to 33.0 m. This indicates that the high-grade spodumene pegmatite zone is concentrically zoned around the quartz core. The Main Dyke in this hole has a narrow low-grade outer pegmatite zone and the total width of the Main Dyke in PWM-17-33 is 32.65 m.

Drill hole PWM-17-34 also has an impressive width of 17.0 m of continuous lithium and tantalum mineralization. Lithium grades are up to 2.59 % Li2O over 1.0 m and 2.42 % Li2O over 2.0 m. Tantalum grades are up to 264.25 ppm Ta over 4.0 m. The Main Dyke in this hole has a second high grade lithium zone of 1.79 % Li2O over 3.0 m. Including the narrow low-grade outer pegmatite zone and the total width of the Main Dyke in PWM-17-34 is 27.5 m.

The Main Dyke is consistently 30-35 m exposed on surface and in shallow drill holes. With depth, the Main Dyke becomes multiple spodumene pegmatite dykes separated by tonalite, but still within the same 30-35 m envelop of mineralization. Additional high-grade lithium intervals include:

- PWM-17-16: 1.12 % Li2O and 119.03 ppm Ta over 7.0 m
- PWM-17-19: 2.56 % Li2O and 47.50 ppm Ta over 1.14 m
- PWM-17-22: 2.95 % Li2O and 255 ppm Ta over 1.0 m
- PWM-17-22: 2.40 % Li2O and 35.45 ppm Ta over 2.0 m

Assay highlights for assays > 0.5 % Li2O holes PWM-17-02 to 34 are given in Table 1. Assays for drill holes PWM-17-01, 04, 08, 09 and 10 are given in Power Metals press release dated Nov. 2, 2017.



Figure 1 Main Dyke, PWM-17-33, boxes 1 to 4, 0.0 to 16.3 m. Note high grade lithium zone in boxes 2 and 3.



Figure 2 Main Dyke, PWM-17-33, box 5 to 8, 16.3 to 33.3 m. Note high grade lithium zone in boxes 6, 7 and 8.

Power Metals is setting up a 2,000 metre drill program on the Northeast Dyke and drilling should start within a week. Grab sample assays from the surface sampling on the Northeast Dyke range from 6.04% to 7.14% Li<sub>2</sub>O (see press release dated Dec. 4, 2017).

On January 10, 2018, the Company announced that the 2000 m drill program on the Northeast Dyke at Case Lake east of Cochrane, Ontario has commenced. Drill hole PWM-18-51, the first drill hole on the Northeast dyke and on the entire claim, is in progress and is collared 5 m north of the spodumene pegmatite outcrop. This shallow hole will drill underneath the location of the surface assay of 7.14 % Li2O (Power Metals press release dated Dec. 4, 2017).

The Northeast Dyke is located 900 m northeast along strike of the recently completed 5400 m drill program on the North and Main Dykes and is within the same tonalite dome as the North and Main Dykes. Since the Northeast, North and the Main Dykes are along the same strike and within the same dome, this indicates that they were emplaced along the same deep-seated structure. The Northeast Dyke has a pair of parallel pegmatite dykes: north and south outcrops similar to the North and Main Dykes that were recently drilled.

On January 18, 2018, the Company announced drill hole assays for lithium (Li) and tantalum (Ta) mineralized intervals for the Main Dyke at Case Lake, east of Cochrane, Ontario. Significant intervals for the Main Dyke include:

- PWM-17-35: 1.17 % Li2O and 165.34 ppm Ta over 8.0 m
- PWM-17-40: 2.07 % Li2O and 213.96 ppm Ta over 18.0 m
- PWM-17-40: 2.81 % Li2O and 143.33 ppm Ta over 7.0 m

Power Metals is also pleased to announce drill hole assays for the two new spodumene pegmatite dykes that were discovered down hole of the Main Dyke near the end of the 2017 drill program (Power Metals press release dated Nov. 27, 2017). The first new dyke was intersected in PWM-17-42 and 43 and then targeted to intersect it again in PWM-17-44 and 49. This new dyke is located 20-40 m down hole from the Main Dyke and 35-40 m vertical depth from the surface. The second new dyke was intersected in PWM17-42 and 49. It is located 50 m down hole from the Main Dyke and 50-80 m vertical depth from surface. Both new dykes are open in all directions. Drilling is required to define these new dykes.

Assay highlights for the first new dyke include:

- PWM-17-42: 0.99 % Li2O and 88.33 ppm Ta over 3.0 m
- PWM-17-43: 0.85 % Li2O and 94.10 ppm Ta over 1.15 m
- PWM-17-44: 1.11 % Li2O and 73.0 ppm Ta over 6.42 m

Assays for the second new dyke contain up to 343.89 ppm Ta. More drill holes intersecting this dyke are needed for a better understanding of it.

Assay highlights for assays > 0.5 % Li2O holes PWM-17-35 to 44 are given in Table 1. Drill hole collar locations are given in Table 2.

Table 1 Assay highlights for PWM-17-35 to 44.

Drill Hole No.	Including	From (m)	To (m)	Interval (m)		Ta (ppm) weighted average
PWM-17-35		5.70	9.00	3.30	1.35	88.49
PWM-17-35	including	5.70	7.00	1.30	2.46	27.70
PWM-17-35		31.00	39.00	8.00	1.17	165.34
PWM-17-35	including	31.00	35.00	4.00	1.75	71.10
PWM-17-35	including	33.00	34.00	1.00	2.26	118.00
PWM-17-35		42.00	43.00	1.00	0.63	34.90
PWM-17-36		61.00	64.00	3.00	1.02	207.33
PWM-17-36	including	62.00	63.00	1.00	2.04	371.00
PWM-17-36		80.00	81.00	1.00	0.51	38.30

PWM-17-37		109.00	110.00	1.00	1.31	24.70
PWM-17-37		115.00	116.00	1.00	0.85	117.00
PWM-17-38		96.00	97.10	1.10	2.19	108.00
PWM-17-39		129.33	130.51	1.18	0.98	64.20
PWM-17-40		18.00	36.00	18.00	2.07	213.96
PWM-17-40	including	20.00	23.00	3.00	2.43	323.33
PWM-17-40	including	25.00	27.00	2.00	1.41	663.50
PWM-17-40	including	27.00	34.00	7.00	2.81	143.33
PWM-17-40		67.00	68.00	1.00	0.76	30.50
PWM-17-42		65.00	68.00	3.00	0.99	88.33
PWM-17-42		90.66	93.00	2.34	0.04	343.89
PWM-17-43		67.65	68.80	1.15	0.85	94.10
PWM-17-44		9.00	11.00	2.00	0.60	38.70
PWM-17-44		54.58	61.00	6.42	1.11	73.00
PWM-17-44	including	57.00	58.00	1.00	1.94	1.90

Drill holes intersected the pegmatite dykes at almost 90 degrees, so intervals are close to true widths.

The Company has an ongoing 2000 m drill program on the Northeast Dyke that started January 10th, 2018.

On January 22, 2018, the Company announced that ongoing drilling has successfully intersected significant high-grade lithium mineralization on the Northeast Dyke at the Company's Case Lake Property in Ontario. The drill program is in its early stages and the presence of up to 30% coarse grained spodumene in drill core has been found in several of the first few holes. The Company is busy logging and cutting core and the first batch of samples have recently been shipped to SGS preparation lab in Cochrane, Ontario. Due to this successful occurrence the Company has increased its current drill program from 2,000m to 3,000m.

On January 24, 2018, the Company announced additional drill hole assays for lithium (Li) and tantalum (Ta) mineralized intervals for the Main Dyke at Case Lake, east of Cochrane, Ontario. Significant intervals for the Main Dyke include:

- 4. PWM-17-45: 1.67 % Li2O and 127.7 ppm Ta over 6.0 m (8.0 to 14.0 m)
- 5. PWM-17-45: 1.58 % Li2O and 233.68 ppm Ta over 8.0 m (23.0 to 31.0 m)
- 6. PWM-17-46: 1.79 % Li2O and 186.45 ppm Ta over 6.0 m  $\,$
- 7. PWM-17-50: 1.31 % Li2O and 106.62 ppm Ta over 6.0 m (12.0 to 18.0 m)
- 8. PWM-17-50: 1.48 % Li2O and 179.35 ppm Ta over 11.0 m (31.0 to 42.0 m)

Drill hole PWM-17-45 has impressive high-grade lithium and tantalum mineralization. Lithium and tantalum grades are up to 1.94 % Li2O and 735.0 ppm Ta. The high-grade coarse-grained spodumene inner intermediate zone from 8.0 to 14.0 m is followed by a very coarse-grained pegmatite zone and K-feldspar and pure quartz core (14.0 to 23.0 m) and by another high-grade coarse-grained spodumene inner intermediate zone from 23.0 to 31.0 m. This indicates that the high-grade spodumene pegmatite zone is concentrically zoned around the quartz core. An impressive 47 cm long spodumene crystal occurs in the core near 10 m depth (Figure 1). The Main Dyke in this hole has a good-grade outer pegmatite zone and the total width of the Main Dyke in PWM-17-45 is 34.71 m.



Figure 1 PWM-17-45 47 cm long spodumene crystal near 10 m.

Drill hole PWM-17-50 has continuous Main Dyke pegmatite for 32.02 m. The pegmatite intersection contained high-grade coarse-grained inner intermediate zone (12.0 to 18.0 m) followed by quartz core and by another high-grade coarse-grained spodumene inner intermediate zone (31.0 to 42.0 m). This indicates again that the high-grade spodumene pegmatite zone is concentrically zoned around the quartz core (Figure 2).



Figure 2 PWM-17-50 Main Dyke continuous pegmatite from 11.18 to 43.2 m. Note abundance of spodumene in boxes 3 and 4 and 7 to 9. Quartz core is in boxes 5 and 6.

Power Metals drilled PWM-17-49 to target both the first and second new spodumene dykes that were discovered down hole of the Main Dyke near the end of the 2017 drill program (Power Metals press release dated Nov. 27, 2017). Both new dykes are open in all directions. Drilling is required to define these new dykes.

Assay highlights for the first new dyke include:

- PWM-17-49: 1.61 % Li2O and 143.8 ppm Ta over 3.0 m
- PWM-17-49: 2.13 % Li2O and 265.0 ppm Ta over 1.0 m

Assay highlights for assays > 0.5 % Li2O holes PWM-17-45 to 50 are given in Table 1. Drill hole collar locations are given in Table 2.

*On February 22, 2018*, The Company announced the completion of the January 2018 Northeast Dyke drill program at its Case Lake Property, Cochrane, Ontario. A total of 33 diamond drill holes comprising of 3,020 metres have now been completed. The drilling successfully intersected multiple coarse-grain pale green spodumene zones at shallow depths and over good intervals (see Figure 1 and Figure 2). All samples have been shipped to SGS Canada Inc. in Cochrane, Ontario.

*On March 8, 2018,* the Company that 20% working interest partner MGX Minerals Inc. (CSE:XMG) has executed a Letter of Intent (the "LOI") with **Orion Laboratories** ("Orion") of Rockford, Tennessee and **Light Metals International Inc.** ("LMI") to jointly develop and commercialize a new method of extraction of lithium compounds from spodumene (hard rock) material or concentrate.

LMI has developed a patent-pending method to rapidly manufacture lithium carbonate (Li2CO3) and/or lithium hydroxide (LiOH) from a variety of spodumene-rich (LiAlSi2O6) concentrates. The technology is modular and highly scalable, thereby enabling a small "factory footprint," and holds the potential to decrease overall hard-rock lithium production costs. Unique features of the technology include:

- Only three feedstock materials are required: (i) a spodumene concentrate, to produce high-purity Li2CO3 and/or high-purity LiOH; (ii) high-purity CO2, which is consumed in forming Li2CO3; and (iii) high-purity H2O, which is consumed in forming LiOH.
- Creates three potentially saleable high-purity products: Li2CO3 and/or LiOH, aluminum hydroxide, Al(OH)3, and amorphous silica, SiO2.
- Eliminates use of conventional sulfuric acid leaching
- Modular capabilities allow for scalable and remote deployment

Orion and LMI are led by Dr. James G. Blencoe. Mr. Blencoe has more than 40 years of experience designing, constructing, operating and maintaining specialized equipment for advanced chemical production. He is considered a foremost expert on thermophysical properties and phase relations of solids, liquids and gases. Mr. Blencoe has developed numerous techniques for the precise and accurate control and measurement of chemical composition in actively-reacting open and closed systems. Prior to entering the private sector as Founder, President and CEO of Orion Laboratories, LLC, he spent 24 years working at the renowned Oak Ridge National Laboratory in Tennessee and nine years working at Pennsylvania State University. Mr. Blencoe has published more than 50 articles and reports in leading peer-reviewed scientific journals and technical magazines. Mr. Blencoe earned a B.S. degree in Mining Engineering from the University of Wisconsin, Madison, in 1968, and a Ph.D. degree in Geology from Stanford University in 1974.

Power Metals has agreed to provide a 10-kilogram spodumene sample of mineralized material originating from the Company's Case Lake lithium project in Ontario, which will be used to perform initial bench-scale laboratory testing.

On March 26' 2018, the Company announced, pursuant to a press release dated March 8<sup>th</sup>, 2018, the Company is in the process of gathering and sending a 10 kg spodumene sample of mineralized material originating from the Company's Case Lake lithium project in Ontario. The Company's 20% working interest partner MGX Minerals Inc. (CSE:XMG) executed a Letter of Intent (the "LOI") with Orion Laboratories ("Orion") of Rockford, Tennessee and Light Metals International Inc. ("LMI") to jointly develop and commercialize a new method of extraction of lithium compounds from spodumene (hard rock) material or concentrate.

*On April 2' 2018*, the Company announced that we are now working on the logistics for the 2018 drill program which will begin following the snow melt in early May. The spring drill targets are estimated to total 8,000 m and the fall drill targets may be increased up to 7,000 m for a total of 15,000 m.

The diamond drill program is fully funded and the Company has a valid MNDM exploration permit for the drilling. Power Metals is planning to meet with Aboriginal groups in the Cochrane area in April.

Table 1 2018 Proposed Drilling at Case Lake

<b>Spring Targets</b>	Area	Meterage
1	Between Main and South Dykes	3,000 m
2	Between Main and NE Dykes	3,000 m
3	West side of Main Dyke	2,000 m
	total	8,000 m

Fall Targets	Area	Meterage
4	East Dyke	2,000 m
5	Down Dip of Main Dyke	3,000 m
6	domes	TBA

#### **Proposed Drilling**

The proposed 8,000 m drilling for the spring/early summer drill program will target the new spodumene pegmatite dykes located between the Main Dyke and the South Dyke (Target 1). These new spodumene dykes were discovered at the end of the 2017 Main Dyke drill program (Power Metals press release dated Nov. 27, 2017). One of the new dykes was intersected in drill hole PWM-17-49 with 1.61 %  $\text{Li}_2\text{O}$  and 143.8 ppm Ta over 3.0 m (Power Metals press release dated Jan. 24, 2018).

The spring/early summer drill program will also target the area between the Main Dyke and the Northeast Dykes (Target 2). Coarse-grained spodumene pegmatite was intersected in the 5,400 m drill program on the Main and North Dykes and in the 3,020 m drill program on the Northeast Dyke. The Northeast Dyke is located 900 m northeast along strike of the North and Main Dykes and is within the same tonalite dome as the North and Main Dykes. Since the Northeast, North and the Main Dykes are along the same strike and within the same dome, this indicates that they were emplaced along the same deep-seated structure. The drill program between the Main and Northeast Dykes will test the presence of the spodumene mineralization along strike.

A drill program will test spodumene mineralization identified during the mapping program on granitic outcrops west of the Main Dyke (Target 3).

Additional targets will be drilled in fall 2018 including the East Dyke, down dip extension of Main Dyke and dome targets identified during the spring mapping program.

On May 15, 2018, the Company announced that the drill contract for Case Lake's upcoming 15,000 m spring/summer drill program has been awarded to Jacob and Samuel Drilling Ltd., Sudbury, Ontario. Drilling will be scheduled to commence as soon as the ½ load road restrictions are lifted in the Cochrane area. The drill program will focus on six distinct drill target areas on the Case Lake Property. The diamond drill program is fully funded and Power Metals has a valid MNDM exploration permit for the drilling.

The Company is also pleased to announce that the geological mapping program at Case Lake, 80 km east of Cochrane, Ontario has begun. A DPGS survey to ±4-16 cm accuracy of Power Metals' 50 drill hole collars on the Main Dyke and 32 drill hole collars on the Northeast Dyke has been completed and will be used to fine-tune the 3D model of both dykes in preparation for the upcoming drill program.

Drilling on the Main Dyke in 2017 identified that the pegmatite dykes are not hosted by a batholith, but by dome-shaped laccoliths. Case Lake Property is 10 km x 9.5 km in size with 9 identified tonalite domes. Only the Henry dome has been mapped and drilled. The Henry dome contains 5 pegmatite dykes: North, Main, South, East and Northeast Dykes. All of these dykes have spodumene in outcrop, except for the beryl-type South Dyke. The North, Main and Northeast dykes also have spodumene in drill core. The spodumene-bearing East Dyke with a 1.2 km strike length has not yet been drilled and is one of Power Metals' drill targets.

Eight of the nine domes have no historic exploration work on them and they have the potential to host spodumene pegmatites similar to the Main and the Northeast Dykes. Exploration on the domes will consist of traverses along GPS grid lines within each dome to map the lithology and collect grab samples to evaluate the lithium content of the tonalite/granodiorite and pegmatite dykes. Pegmatite dykes will be stripped, trenched and power washed to expand their exposure. Spodumene pegmatite dykes will be channel sampled and assayed. Each dome will be evaluated as a potential drill target.

Highlights of the 5,400 m drill program on North, Main and South Dykes include:

- PWM-17-08: 1.94 % Li2O and 323.75 ppm Ta over 26.0 m
- PWM-17-09: 1.23 % Li2O and 148.0 ppm Ta over 16.0 m
- PWM-17-10: 1.74 % Li2O and 245.96 ppm Ta over 15.06 m

Lithium grades are up to 3.29 % Li2O over 1.0 m in PWM-17-08 in the quartz core with coarse-grained pale green spodumene.

*On June 5, 2018*, the Company announced that the geological mapping program at Case Lake, 80 km east of Cochrane, Ontario has resulted in identification of multiple new pegmatite dykes on the Henry Dome. Ground truthing of our drill targets has given us additional confidence in them. Our mapping has confirmed that the potential of lithium mineralization is much bigger than was previously believed at Case Lake.

#### Main Dyke Area Mapping

New spodumene pegmatite occurrences have been identified by Power Metals mapping team and will be followed up with drilling in 2018:

- 9. Two spodumene pegmatite outcrops were found between Main and South Dykes which may correlate to the new dykes 20-40 m down hole of the Main Dyke discovered in drill holes PWM-17-42, 43, 44 and 49 in 2017.
- 10. A structural study of the spodumene outcrop on the east end of the Main Dyke indicates that the dyke changes its orientation from NW-SE to N-S. We will adjust the drill hole orientation in the east end of Main Dyke to target the pegmatite dyke perpendicular to its length.
- 11. Three new spodumene occurrences have been identified along the South Dyke. This is the first time that spodumene has been found on the 320 m long South Dyke.
- 12. In addition to these three new spodumene outcrops, Power Metals also discovered spodumene for the first time on the 1.2 km long East Dyke in 2017 that has never been drilled. Geological mapping this month confirmed the presence of spodumene on the East Dyke. The East Dyke is also among the 2018 drill targets.

The 15,000 m 2018 drill program is fully funded and Power Metals has a valid exploration permit from MNDM for it. The drilling will likely start mid-June.

#### Northeast Dyke Area Mapping

Several new pegmatite dykes were discovered during geological mapping near the Northeast Dyke (Figure 1):

- 5 new spodumene outcrop occurrences were found on the Northeast Dyke
- A new spodumene pegmatite dyke > 4 m wide was discovered 740 m east along strike of the Northeast Dyke on a topographic high.

- A new lithium pegmatite dyke 145 m long with spodumene or petalite was discovered on a topographic high 650 m north of the Northeast Dyke.
- A new lithium pegmatite dyke > 3 m wide with spodumene or petalite was discovered 250 m south of Northeast Dyke.
- The Far East pegmatite located 725 m southeast of the Northeast Dyke also contains possible spodumene.

Assays of grab samples from the geological mapping program are pending.

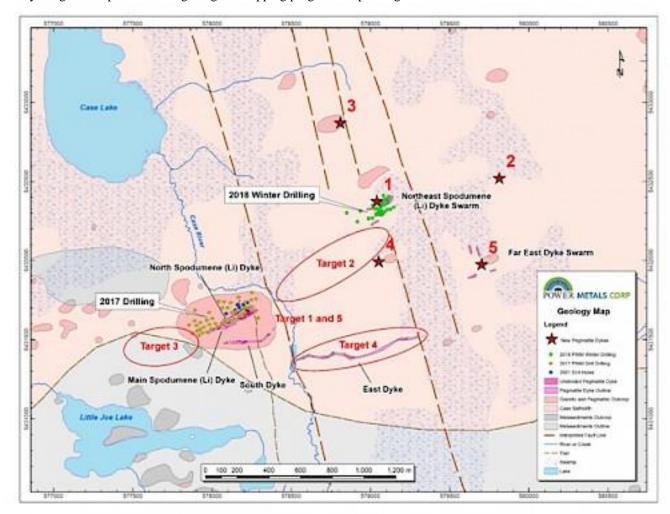


Figure 1 New pegmatite dykes found and drill targets on the Henry Dome, Case Lake, Ontario.

On June 14, 2018, the Company announced that the geological mapping program at Case Lake, 80 km east of Cochrane, Ontario has discovered lithium mineralization on an entire new dome (Dome 9). This is the first time that spodumene has been identified outside of the Henry Dome (Dome 8) where all work to date has been done. This significant discovery validates Power Metals' exploration model that lithium pegmatites are hosted by tonalite domes on the Case Lake Property.

Dome 9 occurs 2.7 km northeast of the Main Dyke and 1.6 km northeast of the Northeast Dyke which were subject to 5,400 m of drilling in 2017 and 3,020 m of drilling in 2018, respectively (Figure 1). Drilling on the Main Dyke identified that the spodumene pegmatites dykes were hosted by the Henry Dome. The Henry Dome includes the spodumene pegmatites: North, Main, South, East and Northeast Dykes. The presence of spodumene on Dome 9 also

indicates that the other 7 domes on the Case Lake Property also have the potential to host spodumene pegmatites. This is the first exploration work on Dome 9 since the Ontario Geological Survey mapped it in 1962.

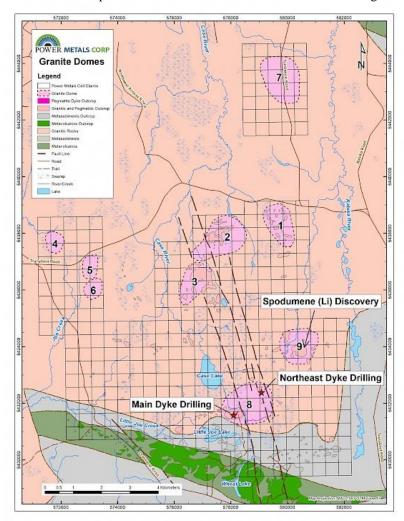


Figure 1: Case Lake exploration target dome map with spodumene discovery on Dome 9. Dome 8 is also known as the "Henry Dome"

The spodumene pegmatite on Dome 9 is a 3 metre wide pegmatite dyke with pale green spodumene crystals up to 7 x 11 cm long in the central part of the dome (Figure 2). The pegmatite dyke is hosted by biotite tonalite that is locally muscovite rich. A 10 metre wide pegmatite dyke with lepidolite, blocky K-feldspar and yellow muscovite was discovered near the spodumene dyke. The presence of lepidolite (lithium mica ore mineral) indicates a high degree of fractionation of the pegmatite melt and the potential for this dyke to also contain spodumene (Figure 3).



Figure 2: Photo of pale green 6 cm diameter spodumene crystal from Dome 9, Case Lake..



Figure 3: Photo of purple lepidolite (Li-mica) from 10 m wide dyke near the spodumene dyke on Dome 9, Case Lake.

Multiple other pegmatite dykes were also discovered on Dome 9:

- 13. Five 1 to 7 m wide pegmatite dykes with blocky K-feldspar up to 15 cm long and yellow muscovite up to 4 cm across occur in the southwest corner of Dome 9.
- 14. One at least 15 m wide pegmatite dyke with blocky K-feldspar and yellow muscovite up to 5 cm across occurs in the northwest corner of Dome 9.

15. A 1.2 m wide x 30 m long pegmatite occurs in the south part of the dome.

This list of pegmatite dykes within Dome 9 is only preliminary as Power Metals has only sampled half of the dome and the outcrop is covered with lichen that needs to be power washed. There is a potential for the other half of the dome to contain similar pegmatite mineralization. All of the pegmatite dykes found to date on Dome 9 have a strike similar to that of the Main Dyke in the Henry Dome.

*On June 21, 2018*, the Company announced that drilling has commenced in the Main Dyke area, on the Henry Dome on the Case Lake Property, 80 km east of Cochrane. The first drill hole for this 2018 summer drill program will be PWM-18-84 on the Main Dyke (Figure 1). A total of 5,400 m of drilling and 50 holes was previously completed on the Main, North and South Dyke last year with great success. Highlights from the 2017 fall/winter drilling on the Main Dyke includes:

PWM-17-08: 1.94 % Li2O and 323.75 ppm Ta over 26.0 m

PWM-17-09: 1.23 % Li2O and 148.0 ppm Ta over 16.0 m

PWM-17-10: 1.74 % Li2O and 245.96 ppm Ta over 15.06 m

Lithium grades are up to 3.29 % Li2O over 1.0 m in PWM-17-08 in the quartz core with coarsegrained pale green spodumene.

Near the end of the 2017 drill program, Power Metals' exploration team discovered two new spodumene pegmatite dykes located between the Main Dyke and the South Dyke. The first new dyke was intersected in PWM-17-42 and 43 with locally up to 30% spodumene. The exploration team then targeted the new dyke to intersect it again in PWM-17-44 and 49. This new dyke is located 20-40 m down hole from the Main Dyke and 35-40 m vertical depth from the surface. The second new spodumene pegmatite dyke was intersected in PWM-17-42 and 49. It is located 50 m down hole from the Main Dyke and 50-80 m vertical depth from surface.

One of the drill targets for the 2018 summer drill program will be to extend the strike length of these two new spodumene pegmatite dykes between the Main and South Dykes.

spodumene pegmatite dykes between the Main and South Dykes.

**On July 9, 2018** the Company announced that the first hole of the summer drill program, PWM-18-84, has successfully intersected 126.25 m of pegmatite within the Main Dyke at Case Lake, east of Cochrane. The purpose of this longitudinal drill hole was to test the continuity of the Main Dyke along strike and down dip. PWM-18-84 intersected continuous pegmatite from 2.0 - 128.25 m.

Drill hole PWM-18-84 has significant intervals which contain spodumene within the Main Dyke:

- 16. 19.17 m interval, 2-21.17 m, of spodumene pegmatite with 5-10% spodumene (Figure 1)
- 17. 16.81 m interval, 54.54-71.35 m, of spodumene granite with locally up to 15% spodumene (Figure 2)
- 18. 8.07 m interval, 71.35-79.42 m, of spodumene pegmatite with locally up to 30% spodumene. The green spodumene is coarse-grained with crystals up to 5 cm across and > 10 cm long.

The drill core samples have been submitted to the lab and assays are pending. Power Metals is drilling in excess of 15,000 m in this summer/fall drill program.



Figure 1 PWM-18-84, boxes 1 to 6, spodumene pegmatite with up to 10% spodumene (boxes 1 to 5) and quartz core (box 6), Main Dyke, Case Lake.



Figure 2 PWM-18-84, boxes 17 to 20, spodumene granite with up to 15% spodumene (boxes 17 to 19) and spodumene pegmatite with coarse-grained spodumene and up to 30% spodumene (boxes 19 and 20), Main Dyke, Case Lake.

On July 31, 2018, the Company announced that the Company's 20% working interest partner, MGX Minerals Inc. ("MGX"), along with Orion Laboratories, LLC ("Orion") and Light Metals International Inc. ("LMI") have commenced laboratory bench-scale testing of a 10 kilogram bulk sample of spodumene-rich drill core originating from the Case Lake lithium project in Ontario. The mineralized material is currently undergoing chemical and mineralogical homogeneity testing, with the objective of extracting lithium compounds and achieving a 95% pure spodumene concentrate. Results of testing performed to date by Orion and LMI indicate that this level of spodumene purity is achievable. Once bench-scale testing has been completed to a satisfactory level, additional mineral separation testing will be conducted to further develop the hydrothermal leaching processes in order to purify highgrade spodumene concentrate.

**On August 21, 2018,** the Company announced assays from the first 8 drill holes on the Company's current 15,000 m drill program at its Case Lake Property, 80 km east of Cochrane, Ontario. Drill hole PWM-18-84 intersected 1.42% Li2O and 158 ppm Ta over 19.17 m on the Main Dyke. The same hole also intersected 1.17% Li2O and 193 ppm Ta over 27.16 m. These two high-grade spodumene pegmatite intervals are separated by the quartz core. The purpose of

this longitudinal drill hole was to test the continuity of the Main Dyke along strike and down dip. PWM-18-84 intersected continuous pegmatite from 2.0 - 128.25 m.

Assay highlights on the Main Dyke include (Table 1):

- 1.42 % Li2O and 158 ppm Ta over 19.17 m, PWM-18-84
- 1.17 % Li2O and 193 ppm Ta over 27.16 m, PWM-18-84
- 2.67 % Li2O over 0.42 m, PWM-18-84
- 1.67 % Li2O and 157 ppm Ta over 10.20 m, PWM-18-9

The summer 2018 drill program also targeted the new spodumene dykes between the Main and South Dykes that were discovered at the end of the 2017 drill program (Power Metals press release dated Nov. 27, 2017). Four separate spodumene pegmatite dykes were intersected in drill holes PWM-18-85, 86 and 87 in close proximity to the Main Dyke. Thus, they will add to a future resource on the Main Dyke. The new dykes between the Main and South Dykes are open along strike.

Assay highlights on the new dykes include (Table 1):

- 1.92 % Li2O over 1.05 m, PWM-18-85
- 1.58 % Li2O over 0.67 m, PWM-18-86
- 1.83 % Li2O over 0.97 m, PWM-18-87

Table 1 Assay highlights for summer 2018 drill program, holes PWM-18-84 to 92, Case Lake.

Drill Hole No.	Including	From (m)	To (m)	Interval (m)	Li <sub>2</sub> O(%)	Ta (ppm)	Zone
PWM-18-84		2.00	21.17	19.17	1.42	158	Main Dyke
PMM-18-84	Including	10.00	14.00	4.00	1.90	242	Main Dyke
PVM-18-84		54.84	82.00	27.16	1.17	193	Main Dyke
PVM-18-84	Including	69.03	73.02	3.99	2.05	144	Main Dyke
PWM-18-84	Including	79.00	79.42	0.42	2.67	57	Main Dyke
PWM-18-85		17.39	18.40	1.01	0.84	70	New Dykes, Main-South
PWM-18-85		52.30	53.85	1.56	1.24	74	New Dykes, Main-South
PWM-18-85		68.62	69.67	1.05	1.92	42	New Dykes, Main-South
PVM-18-85		74.60	75.35	0.75	0.87	101	New Dykes, Main-South
PWM-18-86		40.21	44.53	4.32	0.79	103	New Dykes, Main-South
PWM-18-86		63.63	64.30	0.67	1.58	48	New Dykes, Main-South
PVM-18-87		30.43	31.40	0.97	1.83	80	New Dykes, Main-South
PWM-18-87		34.50	35.86	0.59	1.08	92	New Dykes, Main-South
PVM-18-92		12.80	23.00	10.20	1.67	157	Main Dyke
PWM-18-92	Including	20.00	22.00	2.00	2.26	248	Main Dyke
PWM-18-92		31.10	33.00	1.90	1.21	45	Main Dyke

Drill holes PWM-18-88 to 91 have no significant Li2O values.

On August 23, 2018, the Company announced the discovery of West Joe Dyke spodumene pegmatite on the Case Lake property, 80 km east of Cochrane, northeastern Ontario. Abundant coarse-grained spodumene was discovered in surface outcrop on West Joe Dyke and spodumene was intersected in drill core two days later in drill hole PWM-18-111. West Joe spodumene pegmatite is located 790 m west of Little Joe Lake and 1.6 km southwest of the western edge of the Main Dyke (Figure 1).

In outcrop, West Joe Dyke consists of pale green to white coarse-grained spodumene up to 1 m long (Figure 2) and up to 9 cm wide x 15 cm long. White spodumene suggests low iron content. West Joe also contains coarse-grained white K-feldspar, quartz, muscovite and trace Taoxides minerals and lepidolite. The Ta-oxide crystals are up to 3 cm long (Figure 3).

West Joe Dyke has been intersected in drill holes:

- PWM-18-111, from 6.20-13.20 m, 7.0 m interval of pegmatite with up to 15% coarse-grained spodumene and up to 15 cm long spodumene crystals (Figure 4).
- PWM-18-112, from 7.12-16.52 m, 9.40 m interval of pegmatite with 7.0 m of coarse-grained spodumene with up to 7% spodumene and up to 14 cm long crystals (Figure 5).

Power Metals has started to test West Joe Dyke down dip and has intersected the spodumene pegmatite:

- PWM-18-116, from 43.50-51.25 m, 7.75 m interval with up to 20% coarse-grained spodumene.
- Drill hole PWM-18-116 is down dip of hole PWM-18-112.

Drilling on the West Joe Dyke has just begun and it is open at depth down dip and along strike. Power Metals' team is cutting the core to submit samples to the lab for assays.

Power Metals built a trail to the west side of Little Joe Lake (Figure 1). While drilling the first hole on the west side of Little Joe Lake, the geologist explored the outcrops in the area and discovered spodumene in West Joe Dyke. No historical work has been previously completed on the west side of Little Joe Lake due to difficult access. The new trail has opened up lots of new ground for Power Metals to explore. Power Metals online staked 14 cell claims from the Crossover Road to Little Joe Lake to ensure access to Little Joe Lake. Current geological mapping in the area has shown that the West Joe Dyke is hosted by a new tonalite dome not previously identified. The 1.6 km between West Joe Dyke and Main Dyke has now become an exploration target to search for more spodumene pegmatites.

On September 6, 2018, the Company announced that t drill hole PWM-18-123 has intersected 35 m of pegmatite including highgrade spodumene zones on the West Joe Dyke, Case Lake Property, 80 km east of Cochrane, northeastern Ontario. Power Metals drilled holes PWM-18-123 and 124 parallel to the West Joe Dyke to test the down dip continuity.

Drill hole PWM-18-123 intersected the West Joe pegmatite dyke from 0 to 35 m which includes the following spodumene-rich pegmatite zones (Figures 1 and 2):

- 0.5-19 m (18.5 m interval) with 10-15% spodumene
- 20-20.5 m (0.5 m interval) with 20-30% spodumene
- 23.28-31.0 m (7.72 m interval) with 20-30% spodumene
- 32.1-34 m (1.9 m interval) with 10-15% spodumene

Drill hole PWM-18-124 intersected spodumene pegmatite from 1.5 to 18.9 m (17.4 m interval) with up to 10% spodumene. Drill hole PWM-18- 124 also intersected spodumene pegmatite from 36.3 to 57.5 m (21.2 m interval) which includes the following spodumene-rich pegmatite zones:

- 36.7-45.8 m (9.1 interval) with 7% pink, pale green and grey spodumene
- 45.8-51.5 m (5.7 m interval) with 25 % pale green spodumene in spodumene granite

More drilling will be conducted to determine if the two spodumene pegmatite intersections are two separate dykes or one dyke with a large tonalite xenolith.

Figure 1 Spodumene pegmatite, PWM-18-123, boxes 1-4, 0.0-16.93 m, West Joe Dyke, Case Lake - http://files.newswire.ca/1575/Fig1-Spodumene-peg.jpg

Figure 2 Spodumene pegmatite, PWM-18-123, boxes 5-8, 16.93-34.45 m, West Joe Dyke, Case Lake - http://files.newswire.ca/1575/Fig2-spodumene-peg.jpg

Figure 3 Case Lake Property showing the location of West Joe Dyke. - <a href="http://files.newswire.ca/1575/Fig3-CaseLakeProperty.ipg">http://files.newswire.ca/1575/Fig3-CaseLakeProperty.ipg</a>

**On September 18, 2018,** the Company announced that drill holes PWM-18-100 to 109 successfully extended the East Dyke along strike by 320 m westward from known outcrop. The East Dyke now has a total strike length of 1.1km. The East Dyke is one of six spodumene pegmatite dykes currently identified on the Case Lake Property, 80 km east of Cochrane, Ontario.

Power Metals made a bold step out from the Main Dyke to drill the East Dyke on the west side of the Case River. Power Metals geologists believed that the East Dyke extended on the west side of the Case River even though it did not outcrop on surface. The East Dyke is only exposed on surface on the east side of the Case River. This was the first drill hole on the East Dyke, as it was not drilled historically. The East Dyke has minimal horizontal displacement where the Case River crosses it which is an interpreted fault line. The East Dyke western extension consists of aplite and wall zone (quartz-feldspar-muscovite with trace garnet and lepidolite) hosted by metasedimentary rocks.

The East Dyke western extension was intersected 32 m down hole in shallow holes PWM-18-102 and 105 and 134 and 137 m down hole, respectively, in down dip holes PWM-18-107 and 108. The East Dyke has a strike length of 750 m on the east side of Case River and contains spodumene ranging from 0.5 to 6 cm long (Power Metals press release dated Oct. 10, 2017). The East Dyke now has a total strike length of 1.1 km. The East Dyke is open down dip and along strike and represents an exploration target for lithium mineralization.

Case Lake summer 2018 drill program focused on four exploration targets:

- Main Dyke filling in gaps from summer 2017 drill program
- New dykes between Main Dykes and South Dykes
- East Dyke
- West Joe Dyke

Power Metals is also pleased to announce additional assays from the Main Dyke. The summer 2018 drill program has intersected 1.40 % Li2O and 196 ppm Ta over 6.94 m on Main Dyke in drill hole PWM-18-94 (Table 1). This interval includes 2.01 % Li2O over 3.00 m. Drill hole PWM-18-94 drilled through the North and the Main Dykes and was designed to fill in a gap from the summer 2017 drill program.

Power Metals successfully intersected 1.42 % Li2O and 158 ppm Ta over 19.17 m in the longitudinal hole PWM-18-84 designed to test the continuity of the Main Dyke along strike and down dip (Power Metals, press release dated Aug. 21, 2018). Power Metals also successfully intersected the new dykes between Main and South Dykes with spodumene mineralization including 1.92 % Li2O over 1.05 m from drill hole PWM-18-85 (Power Metals, press release dated Aug. 21, 2018) and in drill holes PWM-18-93 and 98 (Table 1). Power Metals also discovered a new dyke south of the South Dyke in drill hole PWM-18-96 (Table 1).

Power Metals discovered the West Joe Dyke located west of Little Joe Lake in August 2018 (Power Metals press release dated Aug. 23, 2018). In outcrop, West Joe Dyke consists of pale green to white coarse-grained spodumene up to 1 m long and up to 9 cm wide x 15 cm long. Drill hole PWM18-123 parallel to the dyke dip intersected 35 m of pegmatite on West Joe Dyke which includes 18.5 m and 7.72 m of spodumene mineralization. Assays are pending.

Figure 1 Case Lake Property map showing location of drill holes PWM-18-93 to 109. - http://files.newswire.ca/1575/srhj.jpg

Table 1 Assay highlights for summer 2018 drill program, holes PWM-18-93 to 109, Case Lake

Drill Hole No.	Including	From (m)	To (m)	Interval (m)	Li2O (%)	Ta (ppm)	Zone
PWM-18-93		3.55	4.80	1.25	0.74	39	New Dykes, Main-South
PWM-18-94		13.24	14.00	0.76	0.95	47	North Dyke
PMM-18-94 PMM-18-94	Include	42.06 43.00	49.00 46.00	<b>6.94</b> 3.00	<b>1.40</b> 2.01	<b>196</b> 27	Main Dyke Main Dyke
PWM-18-96		40.31	40.70	0.39	0.42	13	New Dyke, south of South Dyke
PWM-18-96		74.64	74.95	0.31	0.61	62	New Dyke, south of South Dyke
PWM-18-98		12.65	13.32	0.67	0.51	38	New Dykes, Main-South
PWM-18-99		32.60	32.92	0.32	0.87	1.2	South Dyke

PWM-18-95, 97, 100-109 have no significant Li values. Mneralized intervals do not necessarily represent true widths.

This press release covers assays from drill holes PWM-18-93 to 109. Assays from subsequent holes from the summer 2018 drill program will be released as they are received. Drill hole collar locations are given in Table 2 and Figure 1.

Table 2 Drill hole collar locations for holes PWM-18-93 to 109, UTM NAD 83, Zone 17.

Drill Hole No.	Easting (m)	Northing (m)	Bevation (m)	Azimuth (°)	Dip (°)	Depth (m)
PWM-18-93	578192.20	5431574.00	351.51	150	45	101
PWM-18-94	578166.29	5431698.30	345.05	150	45	131
PWM-18-95A	578166.12	5431699.00	344.34	150	72	48
PWM-18-95B	578165.90	5431699.30	344.99	150	70	128
PWM-18-96	578296.58	5431520.79	353.96	150	45	80
PVM-18-97	578091.75	5431481.58	348.78	150	45	102
PWM-18-98	578275.74	5431701.80	347.61	135	45	50
PWM-18-99	578337.00	5431538.18	351.63	150	45	116
PWM-18-100	578390.87	5431389.59	349.20	150	45	70
PWM-18-101	578405.70	5431355.31	347.65	150	45	43
PVM-18-102	578394.63	5431376.87	349.08	150	45	81
PWM-18-103	578339.31	5431348.28	351.76	160	45	102
PVM-18-104	578330.45	5431371.40	351.20	160	45	95
PWM-18-105	578267.96	5431337.46	351.33	150	45	104
PVM-18-106	578256.50	5431355.68	349.89	150	45	101
PVM-18-107	578318.74	5431399.54	354.39	160	45	149
PVM-18-108	578240.11	5431384.29	350.72	148	45	146
PVM-18-109	578206.10	5431333.98	348.88	150	45	98

**On October 9, 2018,** the Company announced that drilling on the recently discovered West Joe Dyke at its Case Lake Property has intersected high grade Lithium (Li) and Tantalum (Ta) mineralization (Table 1):

- 2.14 % Li2O and 288 ppm Ta over 7.14 m (43.68-50.82 m), PWM-18-116.
- 1.05 % Li2O and 216 ppm Ta over 7.55 m (7.12-14.67 m), PWM-18-112.

Drill hole PWM-18-116 is the down dip hole of PWM-18-112 which indicates that the spodumene pegmatite zone has consistent width down dip and that the Li grade increases with depth.

Drilling on the West Joe Dyke has intersected exceptionally high-grade lithium intervals:

- 3.88 % Li2O and 925 ppm Ta over 1.0 m, PWM-18-111
- 3.43 % Li2O and 264 ppm Ta over 1.05 m, PWM-18-111B
- 3.07 % Li2O, 611 ppm Ta, and > 10,000 ppm Cs over 1.0 m in PWM-18-116

These high-grade lithium intervals contain abundant pale green spodumene associated with trace orange spessartine garnets. PWM18-111 at 12.1 m has zoned spodumene with pink rim and green core and Cesium (Cs) overlimits (> 10,000 ppm) (Figure 1). PWM18-116 contains pale green spodumene up to 10 cm long and up to 20 vol%. The interval with > 10,000 ppm Cs also contains pollucite and trace orange garnets.

In addition to Lithium and Tantalum mineralization, West Joe Dyke also contains Cesium (Cs) mineralization as shown by the presence of pollucite in drill core. Assay results have Cs overlimits (> 10,000 ppm) for:

- 12-13.2 m (1.2 m interval), PWM-18-111
- 10-11 m (1.0 m interval), PWM-18-112 (Figure 2)
- 43.68 44.68 (1.0 m interval), PWM-18-116
- 46.68 47.68 (1.0 m interval), PWM-18-116
- 48.64 50.1 m (1.46 m), PWM-18-116 (Figure 3)

Re-assays of these high-grade Cs samples are pending.

Pollucite is rare in pegmatites in Ontario, as it has only been identified in five pegmatite localities in the province: Power Metals owned Case Lake and Tot Lake pegmatites and three other localities. Pollucite indicates extreme fractionation of the pegmatitic melt and suggests that the West Joe Dyke is more fractionated than the Main Dyke at Case Lake. This increases the potential to find more spodumene pegmatite dykes with Li, Ta and Cs mineralization near the West Joe Dyke.

Table 1. West Joe Dyke drill hole assays.

Drill Hole No.	Including	From (m)	To (m)	Interval (m)	Li <sub>2</sub> O (%)	Ta (ppm)
PWM-18-111 PWM-18-111	including	6.30 11.00	13.20 12.00	6.90 1.00	1.52 <b>3.88</b>	251 <b>925</b>
PWM-18-111B		7.63	8.07	0.44	3.53	114
PWM-18-111B PWM-18-111B	including	7.63 10.81	13.48 12.80	5.85 1.99	1.89 <b>3.11</b>	168 254
PWM-18-112 PWM-18-112	including	7.12 10.00	14.67 13.00	<b>7.55</b> 3.00	<b>1.05</b> 1.79	<b>216</b> 361
PWM-18-114		6.57	6.82	0.25	0.76	114
PVM-18-115 PVM-18-115	including	2.55 3.55	6.05 4.55	3.50 1.00	1.52 2.55	160 207
PWM-18-116		32.14	33.59	1.45	0.52	481
PWM-18-116 PWM-18-116 PWM-18-116	including including	43.68 46.68 49.10	50.82 47.68 50.10	<b>7.14</b> <b>1.00</b> 1.00	2.14 3.07 2.80	<b>288</b> <b>611</b> 217

PWM-18-110, 113 and PWM-18-117 have no significant Li values

Drill hole collar locations are given in Table 2 and are plotted in Figures 4 and 5. Drill holes intersect the pegmatite dyke at approximately 90°, thus intersected mineralized widths are close to true widths.

Figure 1 Coarse-grained spodumene at 12 m, PWM-18-111, West Joe Dyke. Note spodumene crystal with pink rim and green core. - <a href="http://files.newswire.ca/1575/PowerMetals-Figure1.jpg">http://files.newswire.ca/1575/PowerMetals-Figure1.jpg</a>

Figure 2 Pollucite with white veining in drill core at 11 m, PWM-18-112, West Joe Dyke. - <a href="http://files.newswire.ca/1575/PowerMetals-Figure2.jpg">http://files.newswire.ca/1575/PowerMetals-Figure2.jpg</a>

Figure 3 Pale pink to grey pollucite with white veining next to pale green spodumene at 49.5 m, PWM-18-116, West Joe Dyke. - http://files.newswire.ca/1575/PowerMetals-Figure 3.jpg

West Joe spodumene pegmatite is located 1.6 km southwest of the western edge of the Main Dyke and 3.0 km southwest of the Northeast Dyke (Figure 4). West Joe, Main and Northeast Dykes occur along a SW-NE trend (Figure 4). As the spodumene mineralization is the same in all three dykes and the dykes are along the same trend, the 3.0 km area between West Joe, Main and the Northeast Dykes is a large exploration target for potentially more spodumene pegmatites.

Figure 4 Case Lake Property showing the location of West Joe Dyke, Main Dyke, East and Northeast Dyke drilling. - <a href="http://files.newswire.ca/1575/PowerMetals-Figure4.jpg">http://files.newswire.ca/1575/PowerMetals-Figure4.jpg</a>

Figure 5 Location of drill hole collars for West Joe Dyke drill program. <a href="http://files.newswire.ca/1575/PowerMetals-Figure5.jpg">http://files.newswire.ca/1575/PowerMetals-Figure5.jpg</a>

Table 2 Drill hole collar locations on West Joe Dyke, Case Lake Property. UTM NAD 83, Zone 17. DGPS survey.

BHD	Easting (m)	Northing (m)	Bevation (m)	Azimuth (°)	Dip (°)	Depth (m)
PWM-18-110	576968.25	5431118.64	345.27	95	45	194
PWM-18-111	576322.20	5431104.02	344.66	174	45	44
PWM-18-111B	576321.53	5431104.21	344.58	170	45	26
PWM-18-112	576297.64	5431108.26	345.31	170	45	44
PWM-18-113	576265.30	5431108.13	346.14	170	45	74
PWM-18-114	576353.13	5431108.09	344.17	170	45	42
PWM-18-115	576330.10	5431098.57	345.02	170	45	25
PWM-18-116						
	576301.85	5431143.54	343.17	170	45	96
PWM-18-117	576493.76	5431174.07	339.82	170	45	145

#### Leduc Lithium Property

The Company executed an agreement to acquire lithium brine permit portfolios in Alberta, Canada. Consideration for the property includes the issuance of 5,000,000 shares (issued) of the Company to arm's length parties, includes twenty-three (23) Metallic and Industrial Minerals Permits granted by the Mines and Minerals Act (Alberta), and granting of a 2% gross overriding royalty thereon. The project is one of the largest lithium brine portfolio in Alberta, Canada, as measured by actual coverage over relevant formations, in this case the Leduc Formation (see map attached).

#### Portfolio Highlights:

- Immediate Scale-Up to a 505,000+ Acre Oilfield Lithium Brine Project Base.
- Historic Lithium Sampling up to 135 mg/L.
- Significant Lithium Brine Exploration Opportunities in Infrastructure-Rich Region.
- Permits Contain Oil Field Wellheads Offering Potential for Well Sampling Programs and Oil Company Partnerships.
- Permit Control of the Leduc S, South Formation Water Lithium Target Area.

Alberta Lithium Brine Project

Legend
Power Metals Corp. - PWM.V
Mox Minerals Inc. - MGX.C
Empire Rock Minerals Inc. - EPR.V
Clean Commodities Corp. - CLE.V
Other Claims

Leduc Formation (Lithium Prospective)
Beaverhill Formation (Lithium Prospective)

Beaverhill Formation (Lithium Prospective)

Beaverhill Formation (Lithium Prospective)

Beaverhill Formation (Lithium Prospective)

Beaverhill Formation (Lithium Prospective)

DGRIM

Power Metals Corp.
PWW.V


Figure 1 - Alberta Lithium Brine Project Map (South Leduc Brine project area)

As part of its broader Alberta Lithium Brine Project, the new South Leduc Brine project area, which independently exceeds 450,000 acres, offers significant and cohesive scale and operational efficiencies, particularly when compared to small, geographically-diffused approaches. The sheer district scope of the project area, approaching 70 kilometers on an east west basis and up to 38 kilometers on a north-south basis may assist with eliminating and addressing multi-party drainage conflicts commonly associated with smaller geographical brine districts in other jurisdictions. In Alberta, extractive rights to lithium (and other minerals) accrue to the holder of a Metallic and Industrial Minerals Permit covering the location in question and not to the holder of any rights under oil or gas licenses of same location. As such, petroleum companies operating oil and gas activity in areas of lithium-rich formation water have no legal ownership of prospective lithium brines absent concurrently holding the Metallic and Industrial Minerals Permit. Therein, monopoly holders of lithium right permits have a unique partnership opportunity within Alberta which does not always correspond to other lithium oilfield brine prospects elsewhere. Increased lithium commodity pricing, renewed efforts to cost-recover expenses affiliated with brine water coincidental to maturing hydrocarbon production fields and increased environmental stewardship have brought lithium oilfield brines to the attention of the extractive industry.

The Company encourages investors to review a 2011 report published by the Alberta Geological Survey (AGS) entitled, Geological Introduction to Lithium-Rich Formation Water with Emphasis on the Fox Creek Area of West-Central Alberta (NTS 83F and 83K)(ERCB/AGS Open File 2011- 10)(the "AGS Report").

The AGS Report concluded that Devonian formation waters associated with producing oil and gas wells in the Fox Creek area of west-central Alberta offered mg/L lithium readings ranging from 5-14 times background levels in Alberta resulting in specific lithium in formation water target areas being of potential economic interest. In addition, elevated bromine, boron and potassium offered the possibility for multi-element by-product streams.

Figure 2 – Estimated Areas of Producible Lithium Formation Water in the Leduc Formation and the Beaverhill Lake Group strata (Source Credit: AGS Report)



Government data from the mid-1990s depicting the lithium potential of west-central Alberta: a) distribution of lithium in formation water associated with the Leduc and Swan Hills carbonate complexes (modified from Hitchon et al., 1993); b) estimated areas of producible lithium formation water in the Leduc Formation (N, North; S, South) and the Beaverhill Lake Group (BL) strata (Bachu et al., 1995).

Government data from the mid-1990's (see Figure 2) estimated areas of producible lithium formation water in the Leduc Formation (N, North and S, South) and the Beaverhill Lake Group (BL) strata (Bachu et. al., 1995). As it concerns recent industry efforts around oilfield lithium brine prospects in Alberta, this research is significant in so far as it vectors in on potential brine production areas that may have lithium extraction potential.

Importantly, both the South Leduc Brine project area and MGX Minerals Inc.'s Sturgeon Lake Lithium Brine Project target the same Leduc Formation, with the MGX Mineral Inc. project focusing on the N, North region identified in both Figure 1 and Figure 2 and the Power Metals Corp. project focusing on the S, South region, likewise identified.

The Company is particularly encouraged as the S (South) target identified by Bachu et. al. (see Figures 1 and 2) is spatially much larger than the N (North) target and thus, pending further exploration, may represent a larger in-situ lithium brine target that ultimately exceeds the scale of the geographically-smaller N, North target being pursued by MGX Minerals Inc.

In addition to the South Leduc Brine project area referenced above and as part of the permit portfolio being acquired, the Company will also hold an additional lithium brine prospect {00672029;1} situated immediately northeast of the City of Red Deer, hereafter referred to as the Red Deer Lithium Brine project area.

#### Drumheller and Peace River

The Company entered an agreement to acquire new lithium brine claim areas totaling 42,000 acres of prime ground in the Drumheller and Peace River areas.

As consideration, the Company must issue 650,000 shares, following Exchange approval.

At Drumheller the surface bedrock geology of the Property is comprised entirely of the Horseshoe Canyon Formation.

The target for lithium brines on the Property are the Winterburn Carbonates (the "Target"). Lithium values for the Target were noted in three old wells. Of potential interest is an apparent thickening of the Target towards the southeast on the Property as per old well data.

To view the table and image, please visit: http://media3.marketwire.com/docs/1087895a.pdf

At Peace River, a total of three (3) old wells drilled on the Property have values for lithium brines (mg/L) according to data available from the Alberta Energy Regulator ("AER"). Also according to the AER two of these have been abandoned. These old wells show potential for Triasssic and Carboniferous aged carbonate formations to host lithium brines. Two wells in particular have two distinct carbonate horizons bearing lithium in brines. Also of note is the Viking Formation, much younger in strata which is a clastic and exhibits a low amount of lithium.

To view the table and image, please visit: http://media3.marketwire.com/docs/1087895b.pdf

#### Separation Lake Property

On April 20, 2017, the Company announced the acquisition of the Separation Lithium Property. The property is located 75 km north of Kenora, northwestern Ontario in Separation Lake. The Property is composed of 64 mining claims totaling 1198 ha and is approximately 15 km by 5 km in size.

The project is proximal to Avalon's Big Whopper pegmatite which is located about 3 km west of the western claim block and has a resource of 11.6 million tonnes at 1.34% Li2O, 0.30% Rb2O and 0.007% Ta2O5. This resource has a strike length of 600m to a maximum vertical depth of 250m and the lithium grades are consistent with a petalite content averaging about 25%.

#### Highlights include:

- Over 50 exposures of pegmatite have been identified on the property.
- Twenty-nine drill holes intersected over 775m of pegmatite but only 12% was assayed for lithium.
- Both spodumene and petalite have been identified and are white in colour indicative of high quality lithium mineralization.
- The known petalite pegmatites on Exiro's property define three parallel 70 degrees trends which have not been fully explored.
- The Draven's Pegmatite, located immediately outside Exiro's northern property boundary intersected 1.82% Li2O over 0.85m.
- Ten historical lithogeochemistry anomalies have been identified on the property where two anomalies were drill tested and pegmatite was intersected. The majority of these anomalies have not been drill tested.
- Six historical enzyme leach anomalies were identified that overlap with the lithogeochemistry anomalies providing further evidence of buried pegmatites. One of the enzyme leach anomalies was drill tested successfully intersecting the White Turtle Pegmatite Swarm and the J-Series Pegmatites at depth. The remaining five anomalies have not been drill tested.

On April 3, 2018, the Company announced the planning of a geological mapping program at its Separation Lake Property, (also known as Paterson Lake)located 60 km north of Kenora, Ontario, The purpose of the mapping program is to confirm the location of the known petalite pegmatite dyke outcrops and historic drill collars for a future drill program. The mapping program will also search for petalite (lithium ore mineral) in multiple other pegmatite dyke outcrops on the Property. The mapping program at Paterson Lake will run concurrently with the recently announced 15,000 m drill program at Case Lake.

The Separation Lake Property has been underexplored. Highlights include:

- 7 named petalite pegmatite dykes on the Property and up to 50 unnamed pegmatite occurrences that require investigation
- 11 historic drill holes were drilled by Tanco on the Property, the majority of which were not assayed for lithium (Li), even though petalite was present
- 11 historic lithogeochemical anomalies based on Li+Rb+Cs contents identified, but only 3 anomalies have been partially tested with individual drill holes
- 7 historic enzyme leach B-horizon soil anomalies identified, but only a few of the anomalies have been partially tested with individual drill holes

On May 23<sup>rd</sup>, 2018 the Company announced that the geological mapping program at Paterson Lake, 60 km north of Kenora, Ontario has begun. The geological mapping program at Paterson Lake will be followed by one at Gullwing-Tot Lakes located 30 km northeast of Dryden, Ontario. The purpose of the mapping program at both properties is to confirm the location of the known spodumene/petalite pegmatite dyke outcrops and historic drill collars for a future drill program and to locate additional lithium mineralization.

Highlights of the Separation Lake Property include:

- 7 named petalite pegmatite dykes on the Property and up to 50 unnamed pegmatite occurrences that require investigation
- 11 historic drill holes were drilled by Tanco on the Property, the majority of which were not assayed for lithium (Li), even though petalite was present
- 11 historic lithogeochemical anomalies based on Li+Rb+Cs contents identified, but only 3 anomalies have been partially tested with individual drill holes
- 7 historic enzyme leach B-horizon soil anomalies identified, but only a few of the anomalies have been partially tested with individual drill holes

On July 30, 2018 the Company announced that geological mapping at Paterson Lake, 60 km north of Kenora, northwestern Ontario successfully identified high-grade Lithium (Li) and high-grade Tantalum (Ta) mineralization. The geological mapping program also identified three target areas for follow up exploration:

- Western extension of Marko's Pegmatite
- Rhea's Pegmatite
- Cook's Pegmatite

Paterson Lake grab sample assay highlights from the western extension of Marko's Pegmatite include (Table 1 and Figure 1 and 2):

- Three pure petalite samples (159037, 159201, 159222) with 4.43, 4.17 and 3.90 % Li2O
- Two petalite dominate samples (159217, 159038) with 3.62 and 3.36 % Li2O
- Sample 159218 with abundant petalite with 1.57 % Li2O

Petalite is an ore mineral of Lithium. Petalite (LiAlSi4O10) is the high temperature lithium aluminosilicate whereas spodumene (LiAlSi2O6) is the low temperature/high pressure lithium aluminosilicate.

In addition to Lithium, the western extension of Marko's pegmatite grab samples are also enriched in extremely

high-grade Tantalum (Ta) and Cesium (Cs) with:

- Sample 159219 with 1236 ppm Ta and 2473 ppm Cs
- Sample 159221 with 725 ppm Ta and 472 ppm Cs.

Dr. Selway, VP of Exploration, stated "Paterson Lake Property has so many known pegmatites. I am ecstatic that our due diligence mapping has confirmed the presence of petalite and identified three target areas for exploration follow up. Both the lithium and tantalum grades are extremely high and this gives us great confidence following up these assays with a drill program. Exploration activities on the Paterson Lake Property are ongoing."

The western extension of Marko's pegmatite's grab samples were collected between Marko's petalite pegmatite outcrop to the east and the J-series petalite pegmatite to the west. The grab samples are up to 260 m west of the historically known Marko's pegmatite outcrop. Historical mapping has shown that the Marko's pegmatite occurs along the contact between mafic metavolcanics, gabbro and iron formation. Power Metals grab sampling found the petalite pegmatite samples along strike of Marko's pegmatite along the same lithology contact. Historical mapping has shown that the Marko's pegmatite has a central core of petalite surrounded by blocky pegmatite which hosts Taoxide mineralization.

In 2002, historical drilling indicated that the Marko's pegmatite was 170 m long and made up of 2 to 12 m wide boudinaged lenses. The 2002 drilling also intersected North Marko's pegmatite, a 10 to 30 m wide pegmatite dyke, parallel to Marko's pegmatite with an unknown strike length. This historical drilling did not test the western extension of the Marko's pegmatite. Since Power Metals Li-rich grab samples are along strike of the Marko's pegmatite and North Marko's pegmatite, there is an excellent potential for the Marko's pegmatite to extend westward.



Figure 1 Grab sample 159037 of pure petalite from the western extension of Marko's pegmatite, Paterson Lake Property, Ontario.

Paterson Lake grab sample assay highlights from Rhea's pegmatite include (Table 1 and Figure 2):

- Sample 159021 with 2.31 % Li2O and 111 ppm Ta
- Sample 159022 with 198 ppm Ta.

Cook's pegmatite has elevated Li values up to 0.34 % Li2O and up to 161 ppm Ta. Rhea's pegmatite and Cook's pegmatite are 312 m apart along strike along the contact between mafic metavolcanics, metasediments and mafic tuffs. Rhea's and Cook's pegmatites are along the same contact between mafic metavolcanics and metasediments as other petalite pegmatites historically mapped by Ontario Geological Survey: Draven, Black Bear, Ballpeen, Pegmatites # 5, 6, 7, 8, 9, 10 and 11. The exploration potential is excellent that more petalite pegmatites will be found along this contact on the Paterson Lake Property. The Cook's pegmatite is an enormous pegmatitic granite 420 m long by 140 m wide covered by black lichen. A thorough cleaning of the Cook's pegmatite may result in discovery of lithium mineralization similar to that at Rhea's pegmatite.

Paterson Lake Property occurs within the Separation Rapids Greenstone Belt which is also home to the Big Whopper and Big Mack petalite pegmatites (Figure 2). Separation Rapids Greenstone Belt is known as the Bird River Greenstone Belt in Manitoba which hosts the Tanco pegmatite.

On October 29<sup>th</sup>, 2018 the Company announced that 13 high-grade surface grab samples collected along a 268 m strike length of the Marko's pegmatite have 3.36 to 4.43 % Li2O indicating that they are dominantly petalite (Figure 1). Marko's pegmatite is a petalite pegmatite on Paterson Lake Property, 60 km north of Kenora, northwestern Ontario. It is one of the top three pegmatites for Lithium and Tantalum mineralization in the Separation Rapid Greenstone Belt and is drill ready.

Multiple high-grade Lithium (Li) assays include:

- 3.36 to 4.43 % Li2O range for 13 samples
- 2.17 and 2.92 % Li2O, two samples (159314 and 159316, respectively)
- 1.57 % Li2O, sample 159218



Figure 1 Grab sample 159037 of pure petalite with 4.43 % Li2O from Marko's pegmatite, Paterson Lake Property, Ontario. (CNW Group/POWER METALS CORP)

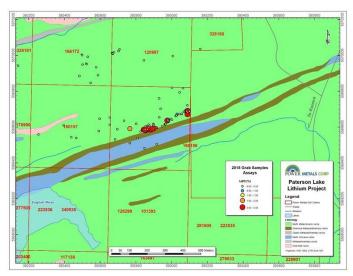


Figure 2 Power Metals summer 2018 grab sampling in Marko's pegmatite area, Paterson Lake Property. (CNW Group/POWER METALS CORP)




Figure 3 Trimble DGPS survey of historic drill hole collars at Marko's pegmatite, Paterson Lake Property. (CNW Group/POWER METALS CORP)

These high-grade lithium samples were collected from three clusters over a 268 m strike length (Table 1, Figure 2). Power Metals geologists successfully located and completed a Trimble DGPS survey on 16 historic drill holes on Marko's Pegmatite and on legacy corner claim posts (Table 2, Figure 3). Historically, there was some confusion as to the location of the Marko's pegmatite. It was believed to be on our neighbour's Property, but our ground truthing and DGPS survey clearly shows that Marko's Pegmatite is on Power Metals' Paterson Lake Property. Our geologists used metal detectors to find the historic casing and were able to read the drill hole numbers on the aluminum tags near the collars. The Marko's pegmatite is one of the top three pegmatites for Lithium and Tantalum mineralization in the Separation Rapid Greenstone Belt. Champion Bear Resources Ltd. drilled 7 holes (SR-01 to 07) totaling 732 m, 9 holes (SR-11 to 19) totaling 1085 m in 2001 and 4 holes (SR-02-26 to 29) totaling 459 m in 2002. For a total of 20 holes and 2276 m all of which except for one hole (SR-19) is on Power Metals' Paterson Lake Property.

Dr. Selway, VP of Exploration, stated "I am excited to confirm that Marko's pegmatite and North Marko's pegmatite historic drill holes are on Power Metals Property thanks to the ground truthing by our geologists. The presence of

Marko's petalite pegmatite increases the lithium potential of the entire property significantly, as we have 268 m strike length of lithium mineralization. I am looking forward to a winter drill program on Marko's pegmatite once we receive permit approval."

Locating Marko's pegmatite on Power Metals Paterson Lake Property has significantly increased the lithium economic potential of the Property. Power Metals will benefit from the historic drilling that showed that there is both Lithium and Tantalum mineralization at depth on the Marko's pegmatite. The lithium mineralization is not limited to just one pegmatite dyke but two pegmatite dykes: Marko's pegmatite and North Marko's pegmatite as shown by historical drilling. Our grab sampling has shown that the lithium mineralization in outcrop on surface has a strike length of 268 m. Marko's pegmatite is drill ready and Power Metals has applied for an exploration permit for drilling from MNDM on Paterson Lake Property.

At Marko's pegmatite, petalite is the dominant lithium ore mineral, but spodumene is also present in the dyke. Petalite (LiAlSi4O10) is the high temperature lithium aluminosilicate whereas spodumene (LiAlSi2O6) is the low temperature/high pressure lithium aluminosilicate. Both petalite and spodumene can be used to produce lithium carbonate and lithium hydroxide for lithium batteries.

In addition to high-grade Lithium mineralization, the Marko's pegmatite also has high-grade Tantalum (Ta) mineralization (Table 1):

- 1398 ppm Ta, sample 159116
- 1236 ppm Ta, sample 159219
- 725 ppm Ta, sample 159221
- 669 ppm Ta, sample 159117
- 559 ppm Ta, sample 159118

Generally, assays above 200 ppm Ta are considered to be ore grade. Tantalum is used in the electronics industry for capacitors and high-power resistors (https://www.chemicool.com/elements/tantalum.html). It is also used to make alloys to increase strength, ductility and corrosion resistance.

Historical drilling indicated that the Marko's pegmatite extends along strike for 190 m in an east-west direction (MNDM assessment report: 52L08SW2011). It has a shallow dip to the south and a maximum thickness of 15 m. Marko's pegmatite occurs in a tension fracture along an iron formation – gabbro contact at surface. North Marko's pegmatite lies along a gabbro – mafic metavolcanics contact at surface, 20 m north of Marko's pegmatite. Marko's pegmatite has a central core of petalite surrounded by blocky pegmatite of quartz and K-feldspar which hosts the tantalum oxide mineralization. On surface, Marko's pegmatite is along the contact of an iron formation and gabbro ridge. The historical drilling did not test the western extension of the Marko's pegmatite which is open along strike. It should be relatively easy to follow the edge of the iron formation and gabbro ridge to extend the strike length of the Marko's pegmatite.

Paterson Lake Property occurs within the Separation Rapids Greenstone Belt which is also home to the Big Whopper and Big Mack petalite pegmatites. Separation Rapids Greenstone Belt is known as the Bird River Greenstone Belt in Manitoba which hosts the Tanco pegmatite.

Power Metals' Paterson Lake property consists of 106 cell claims within the Paterson Lake and Treelined Lake Areas. The Property is approximately 7 km x 3 km in size. Power Metals optioned the Paterson Lake property in 2017 because the property has multiple known petalite pegmatite dykes on surface, but yet is still underexplored.

Table 1 Grab samples assays from Marko's pegmatite, Paterson Lake Property, northwestern Ontario. UTM NAD 83, Zone 15.

Sample	Easting	Northing	Li2O	Ta
Number	(m)	(m)	(%)	(ppm)
159037	392864	5569586	4.43	23.1

159038	392865	5569592	3.36	157
159111	392886	5569586	4.04	26.3
159116	392962	5569615	0.182	1398
159117	392965	5569615	0.147	669
159118	392966	5569617	0.143	559
159201	393087	5569689	4.17	17.4
159217	392853	5569581	3.62	74.3
159219	392901	5569591	0.245	1236
159221	392901	5569591	0.118	725
159222	392900	5569594	3.9	29.7
159301	392882	5569585	3.91	21.4
159302	392892	5569589	3.4	89.7
159303	392892	5569589	3.98	133
159312	392976	5569636	4.08	24.7
159314	392851	5569582	2.17	23.6
159315	392851	5569582	3.78	5.8
159316	392844	5569585	2.92	23.1
159321	393089	5569671	3.78	25.3
159323	393091	5569690	4.09	5.2
•				

Table 2 Trimble DGPS survey of historic drill hole collars on Marko's pegmatite, NAD 83, Zone 15.

Drill hole number	Easting (m)	Northing (m)		Elevation (m)
SR-97-01, SR-97-02	392870.01		5569563.09	347.32
SR-97-05, SR-97-06	392951.90		5569581.76	344.88
SR-01-11, SR-01-12	392823.67		5569550.31	350.18
SR-01-13, SR-01-14	392849.75		5569556.64	348.01
SR-01-15	392894.73		5569572.76	347.04
SR-01-16	392971.42		5569535.49	343.89
SR-01-17	393032.59		5569580.05	344.6
SR-01-18	393081.90		5569649.03	347.95
SR-01-19	393232.67		5569685.36	334.8
SR-02-26, SR-02-29	393101.00		5569625.00	352
SR-02-27	393019.91		5569553.13	341.63
SR-02-28	393055.66		5569595.96	346.74

All holes surveyed by DGPS, except SR-02-26 and SR-02-29 which was surveyed by 20 minute count on hand held GPS.

### Gullwing - Tot Lake Property

*On April 20, 2017*, the Company announced the acquisition of the Gullwing - Tot Lake Property, prospective lithium asset, is located 30 km northeast of Dryden, northwestern Ontario in Webb township. The Property is composed of 76 mining claims totaling 1216 ha and is approximately 17 km by 1.5 km in size.

The Gullwing - Tot Lake pegmatites are located 13 km north east of International Lithium Corp's Mavis Lake - Fairservice pegmatites. International Lithium's partner Pioneer Resource Limited completed 12 drill holes totaling 1,305 m on March 2, 2017 on the Mavis Lake Property with drill highlights of 1.47 % Li2O over 17.9 m and 1.70 % Li2O over 26.3 m (International Lithium, press release dated April 11, 2017).

#### Highlights include:

- The Gullwing-Tot Pegmatite group, also known as the Lateral Lake Stock, has been identified as a east-northeast trending cluster of pegmatites extending 15km in length with a width ranging between 0.8 and 2.2 km. This pegmatite field remains largely unexplored for rare metals and practically unexplored for lithium.
- The Sleeping Giant pegmatite at Gullwing Lake contains rubidium and cesium with a drill hole intersection of 36.3m grading 0.135% Rubium("Rb").
- The Tot Lake Pegmatite was drill tested intersecting up to 5.3m of pale yellow, green and pink spodumene but none of the spodumene bearing intersections were assayed for lithium.
- Dyke chip samples collected across two 9m long trenches on the Tot Lake Pegmatite contained an average grade of 1.0% Li2O.
- More recent grab sampling confirmed a high degree of fractionation of the Tot Lake pegmatite with the presence of large pink spodumene crystals, pollucite and manganotantalite.

The Company can earn from the vendor a 100% interest in the Separation Lake and Gullwing-Tot properties upon the completion of the following:

- i) pay an aggregate of \$200,000 all over a two year period;
- ii) issue \$300,000 worth of the Company's stock all over a two year period;
- iii) incur \$400,000 of work on the properties all over a three year period; and
- iv) pay \$450,000 (in cash or shares at the Company's election) upon a feasibility study being completed on a property.

In addition, Exiro will be entitled to a 0.5% NSR royalty on all production from the Properties.

On April 5, 2018, the Company announced the planning of a geological mapping program at its Gullwing-Tot Lakes Property, located 30km northeast of Dryden, Ontario, will commence following the recently announced Separation Lake mapping program in the coming weeks (see press release dated April 3, 2018). The purpose of the mapping program is to confirm the location of the known spodumene pegmatite dyke out crops and historic drill collars for a future drill program. This mapping program will run concurrently with the recently announced 15,000m drill program at Case Lake(see press release dated April 2, 2018).

Highlights of the Gullwing-Tot Lakes Property include:

- Property has been underexplored with limited historic drill programs not looking for lithium even though spodumeneis present in the drill core.
- The Tot Lake pegmatite contains spodumene blades up to 38 cm long and make up to 78 vol% of the spodumene-rich zone.
- Tot Lake pegmatite one of the five pollucite-bearing pegmatites in Ontario.
- Tot Lake pegmatite has three potential commodities: lithium(Li), tantalum(Ta)and pollucite(Cs).
- Gullwing pegmatite contains two lithium minerals: spodumene and lepidolite

On May 23, 2018, the Company announced that the geological mapping program at Paterson Lake, 60 km north of Kenora, Ontario has begun. The geological mapping program at Paterson Lake will be followed by one at Gullwing-Tot Lakes located 30 km northeast of Dryden, Ontario. The purpose of the mapping program at both properties is to confirm the location of the known spodumene/petalite pegmatite dyke outcrops and historic drill collars for a future drill program and to locate additional lithium mineralization.

Highlights of the Paterson Lake Property include:

- 7 named petalite pegmatite dykes on the Property and up to 50 unnamed pegmatite occurrences that require investigation
- 11 historic drill holes were drilled by Tanco on the Property, the majority of which were not assayed for lithium (Li), even though petalite was present
- 11 historic lithogeochemical anomalies based on Li+Rb+Cs contents identified, but only 3 anomalies have been partially tested with individual drill holes
- 7 historic enzyme leach B-horizon soil anomalies identified, but only a few of the anomalies have been partially tested with individual drill holes

Highlights of the Gullwing-Tot Lakes Property include:

- Property has been underexplored with limited historic drill programs not looking for lithium even though spodumene is present in the drill core.
- The Tot Lake pegmatite contains spodumene blades are up to 38 cm long and make up to 78 vol% of the spodumene-rich zone.
- Tot Lake pegmatite is one of the five pollucite-bearing pegmatites in Ontario.
- Tot Lake pegmatite has three potential commodities: lithium (Li), tantalum (Ta) and pollucite (Cs). Gullwing pegmatite contains two lithium minerals: spodumene and lepidolite

On July 11, 2018, the Company announced that their geological mapping team has confirmed the presence of abundant high-grade Lithium (Li), Cesium (Cs) and Tantalum (Ta) mineralization at Tot Lake pegmatite, Webb township, 30 km northeast of Dryden, northwestern Ontario. The focus of the exploration program at Tot Lake is Lithium mineralization in the form of pale green, white and pink blades of spodumene. Additionally, we are fortunate to have found Cesium mineralization (i.e., pollucite) and Tantalum mineralization (i.e., Ta-oxide minerals).

Spodumene is present throughout the Tot Lake pegmatite, which has an abundance of impressive megacrystic spodumene blades. Pale green megacrystic spodumene blades up to 75 cm long and 15 cm wide were identified next to megacrystic K-feldspar crystals in historical trench 3 (Figure 1).

The Ta-oxide crystals are up to 1 by 2 cm in size and are some of the largest Ta-oxide crystals in pegmatites in the province of Ontario. Typically, Ta-oxide minerals are 1 to 2 mm in size. The Ta-oxides at Tot Lake occur along the outer margins of blocky albitized K-feldspar megacrysts (Figure 2).

Pollucite (Cs ore mineral) at Tot Lake is concentrated in a 1 by 5 m pod near the southwestern end of the pegmatite dyke where it comprises 32 vol% of the pod (Breaks et al., 2014). Power Metals geological mapping team found pollucite interstitial to parallel spodumene blades (Figure 3). Pollucite is rare in nature and is only known at four other pegmatite localities in Ontario (Breaks et al., 2014). Pollucite is an indicator mineral for extreme chemical fractionation.

Figure 1 Megacrystic spodumene blade 75 cm long by 15 cm wide next to tape measure. Also shown megacrystic white K-feldspar, Tot Lake. - <a href="http://files.newswire.ca/1575/PWM\_July\_11\_1.jpg">http://files.newswire.ca/1575/PWM\_July\_11\_1.jpg</a>

Figure 2 Photo of > 10 black Ta-oxide crystals each about 1 cm in diameter. Grey is quartz and beige is albitized K-feldspar megacrysts, Tot Lake. - http://files.newswire.ca/1575/PWM\_July\_11\_2.jpg

Figure 3 Multiple white parallel spodumene blades within pollucite pod, Tot Lake. - http://files.newswire.ca/1575/PWM July 11 3.jp

On September 10, 2018, the Company announced that assays have confirmed the presence of high grade Lithium (Li) and Tantalum (Ta) mineralization on Gullwing-Tot Lakes Property located 30 km northeast of Dryden, Ontario. Gullwing Lake pegmatite and Tot Lake pegmatite are located 6.3 km apart and are hosted by the same mafic metavolcanics unit.

The assay highlights from grab samples from Tot Lake pegmatite include:

- 4.58 % Li2O from quartz spodumene core, sample 159056 (Figure 1 http://files.newswire.ca/1575/fig 1.jpg)
- 2.62 % Li2O from quartz spodumene core, sample 159057
- 1.68 % Li2O and 233 ppm Ta from pink spodumene pegmatite zone, sample 1590235
- 498 ppm Ta from albitized K-feldspar zone, sample 159238 (Figure 2 http://files.newswire.ca/1575/fig\_2.jpg)

The assay highlights from grab samples on the Gullwing North outcrop include:

- 6.78 % Li2O from pure spodumene sample, sample 159082 (Figure 3 http://files.newswire.ca/1575/fig\_3.jpg)
- 0.73 % Li2O from spodumene albite quartz sample, sample 159084
- 759 ppm Ta from large Ta-oxide crystals in albite unit, sample 159254 (Figure 4 http://files.newswire.ca/1575/fig\_4.jpg)

Location map for Gullwing and Tot Lakes pegmatites is given in Figure 5 and tables of assays and UTM coordinates are given in Tables 1 and 2.

Mapping on Tot Lake pegmatite revealed eye-popping lithium and tantalum mineralization with pale green megacrystic spodumene blades up to 75 cm long and 15 cm wide identified next to megacrystic K-feldspar crystals in historical trench 3 (Power Metals Corp, press release dated July 11, 2018). The Ta-oxide crystals are up to 1 by 2 cm in size and are some of the largest Ta-oxide crystals in pegmatites in the province of Ontario. Typically, Ta-oxide minerals are 1 to 2 mm in size. In addition to lithium and tantalum mineralization, the cesium mineralization is also impressive at Tot Lake. Pollucite (Cs ore mineral) at Tot Lake is concentrated in a 1 by 5 m pod near the southwestern end of the pegmatite dyke where it comprises 32 vol% of the pod (Breaks et al., 2014). Pollucite is rare in nature and is only known at four other pegmatite localities in Ontario (Breaks et al., 2014). Pollucite is an indicator mineral for extreme chemical fractionation.

Table 1 High grade Li assays for grab samples from Gullwing and Tot Lakes pegmatites, UTM NAD 83, Zone 15.

Sample No.	Station	Easting (m)	Northing (m)	Bevation (m)	Lithology	Ta (ppm)	Li <sub>2</sub> O (%)	Pegmatite
159082	JK-18-157	532777	5529476	397	Pegmatite	7.2	6.78	Gullwing North
159056	JK-18-126	538935	5530873	287	Pegmatite	27.8	4.58	Tot Lake
159057	JK-18-126	538935	5530872	287	Pegmatite	78	2.62	Tot Lake
159235	AV-18-075	538930	5530873	397	Pegmatite	233	1.68	Tot Lake
159059	JK-18-126	538934	5530872	396	Utramafic Volcanic	18.2	0.757	Tot Lake
159084	JK-18-158b	532777	5529480	393	Pegmatite	40.6	0.733	Gullwing North
159058	JK-18-127	538936	5530878	392	Pegmatite	9.2	0.551	Tot Lake
159241	AV-18-080	538932	5530877	400	Pegmatite	40	0.512	Tot Lake

Sample 159059 represents the metasomatized ultramafic host rock next to spodumene-rich pegmatite.

Table 2 High grade Ta assays for grab samples from Gullwing and Tot Lakes pegmatites, UTM NAD 83, Zone 15.

Sample	Station	Easting	Northing	Bevation	Lithology	Ta	Li <sub>2</sub> O	Do our otito
No.		(m)	(m)	(m)		(ppm)	(%)	Pegmatite
159254	AV-18-104	532783	5529473	401	Pegmatite	759	0.007	Gullwing North
159238	AV-18-078	538918	5530897	399	<b>Pegmatite</b>	498	0.019	Tot Lake (north)
159235	AV-18-075	538930	5530873	397	Pegmatite	233	1.68	Tot Lake
159237	AV-18-077	538916	5530888	401	Pegmatite	227	0.342	Tot Lake
159239	AV-18-079	538933	5530876	397	Regmatite	208	0.004	Tot Lake
159262	AV-18-111	532774	5529386	413	Pegmatite	150	0.013	Central Gullwing
159236	AV-18-076	538935	5530874	395	Pegmatite	101	0.061	Tot Lake

Figure 5 Location of high grade grab samples from Gullwing and Tot Lakes pegmatites, northeast of Dryden. - http://files.newswire.ca/1575/fig 5.jpg

#### **Liquidity and Going Concern**

The Company has financed its operations to date primarily through the issuance of common stock. The Company continues to seek capital through various means including the issuance of equity.

The financial statements are prepared on a going concern basis which assumes that the Company will be able to realize its assets and discharge its liabilities in the normal course of business for the foreseeable future.

As at August 31, 2018, the Company had an accumulated deficit of \$31,158,488 (November 30, 2017 - \$24,551,053). In addition, the Company has not generated revenues from operations. These circumstances lend substantial doubt as to the ability of the Company to meet its obligations as they come due, and accordingly, the appropriateness of the use of accounting principles applicable to a going concern.

Although the financial statements have been prepared using IFRS applicable to a going concern, the above noted conditions raise significant doubt regarding the Company's ability to continue as a going concern.

In order to continue as a going concern and to meet its corporate objectives, the Company will require additional financing through debt or equity issuances or other available means. Although the Company has been successful in the past in obtaining financing, there is no assurance that it will be able to obtain adequate financing in the future or that such financing will be on terms advantageous to the Company.

The Company has a working capital of \$1,949,661 at August 31, 2018 compared to working capital deficiency of \$1,451,034 at November 30, 2017.

Net cash used in operating activities for the period ended August 31, 2018 was \$3,521,603 compared to \$1,002,711 for the period ended August 31, 2017 and consists primarily of the operating loss adjusted for changes in non-cash working capital items (see "Results of Operations" for information on operating loss differences for both periods).

Net cash used in investing activities for the period ended August 31, 2018 was \$1,351,539 compared to \$747,389 for the period ended August 31, 2017 due to expenditures on exploration properties in the current period.

Net cash provided by financing activities for the period ended August 31, 2018 was \$6,469,519 compared to \$2,212,739 for the period ended August 31, 2017, as a result of proceeds of \$6,200,014 from a private placement less \$544,546 in share issuance cost, \$657,337 of loan repayment, and \$359,433 from warrants exercised.

#### **Share Capital & Reserves**

During the period from December 1, 2017 to October 24, 2018, the Company:

- i) Closed a private placement financing of 1,071,428 flow-through units at a price of \$0.70 per unit raising total proceeds of \$750,000. The flow-through shares were valued at \$717,857 and the residual value of \$32,143 was allocated to deferred premium on flow-through shares. Each flow-through unit is comprised of one common share and one-half share purchase warrant. Each whole warrant is exercisable into one common share at \$1.10 per share, for a period of one year. In connection with the private placement, the Company paid share issuance costs of \$45,000 in cash.
- ii) Closed a private placement financing of 6,900,000 units at a price of \$0.50 per unit raising total proceeds of \$3,450,000. Each unit is comprised of one common share and one share purchase warrant. Each warrant is exercisable into one common share at \$0.70 per share, for a period of two years. In connection with the private placement, the Company paid share issuance costs consisting of \$318,400 in cash, and granted 414,000 share purchase warrants with a fair value of \$189,914 using the Black-Scholes option pricing model assuming expected life of 2 years, a risk-free interest rate of 1.76%, a forfeiture rate of 0% an expected volatility of 111.09%, and an exercise price of \$0.70.
- iii) Issued 2,343,667 shares pursuant to the exercise of warrants for gross proceeds of \$351,550.

- iv) Issued 52,556 shares pursuant to the exercise of agent's warrants for gross proceeds of \$7,883 and accordingly, the Company reallocated \$12,418 of share-payment reserve to share capital.
- v) Issued 138,461 shares with a total fair value of \$88,615 for the acquisition of the Separation Lake and Gullwing-Tot.
- vi) Closed a private placement financing of 3,448,300 units at a price of \$0.58 per unit raising total proceeds of \$2,000,014. The flow-through shares were valued at \$1,275,871 and the residual value of \$724,143 was allocated to deferred premium on flow-through shares. Each flow-through unit is comprised of one common share and one-half share purchase warrant. Each whole warrant is exercisable into one common share at \$0.85 per share, for a period of two years. In connection with the private placement, the Company paid share issuance costs consisting of \$181,146 in cash, and granted 206,896 share purchase warrant with a fair value of \$32,879 using the Black-Scholes option pricing model assuming expected life of 2 years, a risk-free interest rate of 1.77%, a forfeiture rate of 0% an expected volatility of 101.66%, and an exercise price of \$0.58.

### **Results of Operations**

During the nine period ended August 31, 2018, the Company recorded a loss and comprehensive loss of \$6,607,435 (2017 - \$2,747,767). The increase in loss is primarily as a result of stock-based compensation and marketing, promotion, and communication of in the current period. Other significant expenses during the period ended August 31, 2018 include the following:

- Consulting of \$246,018 (2017 \$60,729) increased due to the higher activities during the current period.
- Filing fees of \$86,629 (2017 \$44,961) increased due to fees incurred relating to private placements in the current period.
- Gain on settlement of accounts payable of \$38,080 (2017 \$Nil) due to forgiveness of debt at an agreed-upon with arm's length parties.
- Investor relations of \$211,528 (2017 \$45,752) increased due to investor relations services incurred in effort to seek opportunities for financing during the current period.
- Management fee of \$205,834 (2017 \$Nil) increased due to voluntary reduction in management fees by the CEO and CFO in the comparative period.
- Marketing, promotion and communication of \$1,875,391 (2017 \$597,674) increased due to communication and marketing efforts to raise investor awareness during the current period.
- Office and miscellaneous of \$127,279 (2017 \$73,083) increased due to the higher activities during the current period
- Other income of \$179,447 (2017 \$39,914) increased due to recovery of flow-through share liability through incurring expenditures during the current period.
- Professional fees of \$182,103 (2017 \$70,149) increased due to general and corporate legal fees incurred during the current period.
- Realized loss on marketable securities of \$468,046 (2017 \$Nil) due to sales of MGX Minerals Inc. shares that was received during current period.
- Share-based compensation of \$2,952,053 (2017 \$1,642,193) increased due to stock options being granted in the current period.

- Travel of \$213,733 (2017 \$73,578) increased due to more trips being taken to meetings and visits to the mineral properties during the current period.
- Unrealized loss on marketable securities of \$230,000 (2017 \$Nil) from the fair value of MGX Minerals Inc. shares held during current period.
- Write-off of exploration properties of \$Nil (2017 \$82,812) due to write off of Coyote Project, Bromley Creek Project, and Larder River Property.

During the three period ended August 31, 2018, the Company recorded a loss and comprehensive loss of \$1,097,145 (2017 - \$920,541). The increase in loss is primarily as a result of stock-based compensation and marketing, promotion, and communication of in the current period. Other significant expenses during the period ended August 31, 2018 include the following:

- Consulting of \$45,874 (2017 \$25,345) increased due to the higher activities during the current period.
- Investor relations of \$23,042 (2017 \$Nil) increased due to investor relations services incurred in effort to seek opportunities for financing during the current period.
- Management fee of \$73,595 (2017 \$Nil) increased due to voluntary reduction in management fees by the CEO and CFO in the comparative period.
- Marketing, promotion and communication of \$318,982 (2017 \$74,812) increased due to communication and marketing efforts to raise investor awareness during the current period.
- Office and miscellaneous of \$41,481 (2017 \$21,430) increased due to the higher activities during the current period
- Other income of \$147,304 (2017 \$13,788) increased due to recovery of flow-through share liability through incurring expenditures during the current period.
- Professional fees of \$77,711 (2017 \$14,890) increased due to general and corporate legal fees incurred during the current period.
- Realized loss on marketable securities of \$260,001 (2017 \$Nil) due to sales of MGX Minerals Inc. shares that was received during current period.
- Share-based compensation of \$48,159 (2017 \$721,365) increased due to stock options being granted in the comparative period.
- Travel of \$85,948 (2017 \$39,798) increased due to more trips being taken to meetings and visits to the mineral properties during the current period.
- Unrealized loss on marketable securities of \$230,000 (2017 \$Nil) from the fair value of MGX Minerals Inc. shares held during current period.

### **Selected Quarterly Information**

The following selected financial data has been prepared in accordance with IFRS and should be read in conjunction with the Company's audited financial statements. All dollar amounts are in Canadian dollars.

	exploration and cluations assets	Interest Income	Earnings/ (Loss)	Basic and Diluted Loss/Share
August 31, 2018	\$ 5,918,016	\$ -	\$ (1,097,145)	\$ (0.01)
May 31, 2018	\$ 6,614,645	\$ -	\$ (2,294,183)	\$ (0.02)
February 28, 2018	\$ 7,602,367	\$ -	\$ (3,216,106)	\$ (0.04)
November 30, 2017	\$ 7,121,762	\$ -	\$ (2,671,653)	\$ (0.03)
August 31, 2017	\$ 5,702,693	\$ -	\$ (920,541)	\$ (0.01)
May 31, 2017	\$ 5,417,453	\$ -	\$ (657,975)	\$ (0.01)
February 28, 2017	\$ 3,604,750	\$ _	\$ (1,129,251)	\$ (0.02)
November 30, 2016	\$ 1,632,132	\$ -	\$ (5,890,657)	\$ (0.20)
August 31, 2016	\$ 5,695,398	\$ -	\$ (71,207)	\$ (0.00)

During the three month ended November 30, 2017, the Company incurred a loss of \$2,671,653 which was primarily attributable to the Company abandoning option agreements and writing down properties of \$2,188,652, granting of share-based compensation of \$1,642,193 and marketing, promotion and communication activities of \$987,046. During the three month period ended November 30, 2016, the Company incurred a loss of \$5,890,657 which was primarily attributable to the Company abandoning option agreements and writing down the following exploration and evaluation asses Upper Maybelle River Property of \$406,106 and Triple M Uranium Property of \$5,383,992.

#### **Financial Instruments and Risk**

Financial instruments measured at fair value are classified into one of three levels in the fair value hierarchy according to the relative reliability of the inputs used to estimate the fair values. The three levels of the fair value hierarchy are:

- Level 1 Unadjusted quoted prices in active markets for identical assets and liabilities;
- Level 2 Inputs other than quoted prices that are observable for the asset or liabilities either directly or indirectly; and
- Level 3 Inputs that are not based on observable market data.

The Company's primary financial instruments are classified as follows:

Financial instrumentsClassificationsCashLoans and receivablesReceivableLoans and receivablesAccounts payable and accrued liabilitiesOther financial liabilitiesLoans payableOther financial liabilities

The fair value of these assets and liabilities approximates their respective carrying amounts due to their short term nature.

The Company's risk exposures and the impact on the Company's financial instruments are summarized below:

#### Credit risk

Credit risk is the risk of loss associated with counterparty's inability to fulfill its payment obligations. As at August 31, 2018, the Company had \$119,736 (November 30, 2017 – \$106,928) receivable from government authorities in Canada and an arm's length vendor party. The Company believes it has no significant credit risk.

#### Liquidity risk

The Company's approach to managing liquidity risk is to ensure that it will have sufficient liquidity to meet liabilities when due. As at August 31, 2018 the Company had a cash balance of \$1,630,045 (November 30, 2017 – \$33,668) to settle current liabilities of \$581,008 (2017 – \$1,591,630). The Company will require financing from lenders, shareholders and other investors to generate sufficient capital to meet its short term business requirements. All of the Company's financial liabilities have contractual maturities of 30 days or due on demand and are subject to normal trade terms.

#### Market risk

Market risk is the risk of loss that may arise from changes in market factors such as interest rates, foreign exchange rates, and commodity and equity prices.

#### (a) Interest rate risk

The Company has cash balances and interest-bearing debt. The Company is satisfied with the credit ratings of its banks. As of August 31, 2018, the Company did not hold any investments. The Company believes it has no significant interest rate risk.

#### (b) Foreign currency risk

As at August 31, 2018, the Company has a minimal balance of cash in US dollar and does not believe that the foreign currency risk related to the balance is significant.

#### (c) Price risk

The Company has no contractual commodity price risk. The recoverability of the Company's deferred exploration costs is indirectly related to the market price of precious and base metals. The Company's ability to continue with its exploration program is also indirectly subject to commodity prices. Commodity price risk is significant to the Company. Much of this is out of the control of management and will be dealt with based on circumstances at any given time.

### **Related Party Balances and Transactions**

Transactions with related parties and key management personnel are as follows:

	Nature of transactions	August 31, 2018	August 31, 2017
Key management personnel:			
Chairman and Director A company controlled by CFO and Director	Management Management	\$ 179,195 50.000	\$ -
A company controlled by CPO and Director  A company controlled by former VP Exploration and	Geological and field costs	30,000	-
Development	i)	-	8,000
VP Exploration and a company controlled by VP Exploration	Geological and field costs	5.57.040	
	i)	 557,048	
Total		\$ 786,243	\$ 8,000
Other related parties:			
A Company controlled by the CFO and Director	Professional	\$ 90,500	\$ -
A firm of which the CFO and Director was a partner	Professional	\$ _	\$ 6,000

i) Capitalized in exploration and evaluation assets.

During the period ended August 31, 2018, the Company granted 1,000,000 stock options (2017 - 2,950,000) to an officer resulting in share-based compensation of \$701,450 (2017 - \$690,603).

The amounts due to other related parties and key management personnel included in accounts payable and accrued liabilities are as follows:

	August 31, 2018	N	November 30, 2017
Due to the Chairman and Director	\$ _	\$	23,361
Due to a company controlled by the CFO and Director	6,493		159,793
Due to a company controlled by former VP Exploration and Development	233,603		233,603
Due to a Director	13,125		13,125
Due to VP Exploration and a company controlled by VP Exploration	 <u> </u>		69,184
	\$ 253,221	\$	499,066

The amounts due to related parties are unsecured non-interest bearing and are due on demand.

Included in prepaid expenses as at August 31, 2018 is \$12,388 (November 30, 2017 - \$Nil) paid to the chairman of the Company.

#### **Off-Balance Sheet Arrangements**

The Company has not engaged in any off-balance sheet arrangements such as obligations under guarantee contracts, a retained or contingent interest in assets transferred to an unconsolidated entity, any obligation under derivative instruments or any obligation under a material variable interest in an unconsolidated entity that provides financing, liquidity, market risk or credit risk support to the Company or engages in leasing or hedging services with the Company.

#### **Capital Management**

The Company's objective when managing capital is to safeguard the entity's ability to continue as a going concern.

In the management of capital, the Company monitors its adjusted capital which comprises all components of equity (ie. share capital, reserves and deficit).

The Company sets the amount of capital in proportion to risk. The Company manages the capital structure and makes adjustments to it in the light of changes in economic conditions and the risk characteristics of the underlying assets. In order to maintain or adjust the capital structure, the Company may issue common shares through private placements. The Company is not exposed to any externally imposed capital requirements.

No changes were made to capital management during the period ended August 31, 2018.

### New Or Revised Standards And Amendments To Existing Standards Not Yet Effective

Please refer to the unaudited condensed interim financial statements for the period ended August 31, 2018 on www.sedar.com.

### **Outstanding Share Data**

As at October 24, 2018, the Company had the following securities issued and outstanding:

		Exercise	Expiry
	Number	Price	Date
Common Shares	101,220,910		
Warrants	535,714	\$1.10	December 5, 2018
warrants	2,970,000	\$0.15	December 20, 2018
	1,699,999	\$0.15 \$0.15	January 3, 2019
	49,911	\$0.15 \$0.15	January 3, 2019
	583,333	\$0.40	July 7, 2019
	6,900,000	\$0.70	January 12, 2020
	414,000	\$0.70	January 12, 2020
	1,724,152	\$0.76 \$0.85	June 27, 2020
	206,898	\$0.58	June 27, 2020
	200,838	Φ0.56	Julie 27, 2020
	15,084,007		
Options	366,665	\$0.51	January 7, 2019
1	165,023	\$0.51	March 12, 2019
	101,664	\$0.48	May 1, 2019
	50,000	\$0.36	October 28, 2019
	250,000	\$0.40	June 27, 2021
	550,000	\$0.23	January 16, 2022
	200,000	\$0.48	February 20, 2022
	100,000	\$0.33	March 12, 2022
	3,000,000	\$0.28	July 17, 2022
	3,300,000	\$0.81	January 4, 2023
	1,000,000	\$0.65	March 15, 2023
	9,083,352		
Total diluted at October 24, 2018	125,388,269		

#### **Others Activities**

On June 29, 2018, the Company announced that it has engaged San Diego Torrey Hills Capital, Inc. ("Torrey Hills Capital"), a Rancho Santa Fe, California based investor relations firm, to provide market awareness and investor relations services to the Company, subject to TSX Venture Exchange acceptance.

Torrey Hills Capital is a leading investor and financial public relations firm specializing in small and microcap companies. Torrey Hills Capital will increase awareness about Power Metals through its established relationships with investment professionals, investment advisors, and money managers focused on the microcap market space. This will allow the Company to build and maintain an informed investor audience in both the U.S. and Canadian marketplaces.

Torrey Hills Capital has been engaged at a rate of \$5,000 per month for an initial term of 6 months, after which the engagement will become month to month, subject to a 30-day termination notice by either party after month three. In addition, Power Metals has agreed to a one-time grant of 250,000 incentive stock options (the "Options") exercisable at a price of \$0.40 per share for a period of three years. The Options shall be subject to the terms of the Company's stock option plan and will vest in accordance with the provisions therein and the policies of the TSX Venture Exchange.

Torrey Hills Capital currently has no direct or indirect interest in the securities of Power Metals, or any right or intent to acquire such an interest except pursuant to the exercise of the above referenced Options.

The appointment of Torrey Hills Capital as an investor relations consultant of Power Metals and the granting of the Options remain subject to regulatory acceptance of applicable filings with the TSX Venture Exchange.

Torrey Hills Capital was formed in 1998 and is headquartered in Rancho Santa Fe, California. The team of professionals offers experience and expertise in investor relations, corporate communications, non-deal road shows, and market support activities. Torrey Hills Capital specializes in the development and marketing of emerging growth companies which trade in the United States (NYSE, AMEX, and OTC) and in Canada (TSX, TSX-V, and CSE). Marketing activities articulate key investment attributes, strategic direction, and financial expectations, which combine to ensure that client market value fully reflects past achievements and future opportunities. Further information is available at www.torreyhillscapital.com.